



70 SERIES THERMAL BREAK ALUMINUM WINDOW	09
K80 SERIES THERMAL BREAK ALUMINUM WINDOW	15
91 SERIES THERMAL BREAK ALUMINUM CASEMENT WINDOW	31
96 SERIES ALUMINUM SLIDING DOOR	35
130 SERIES ALUMINUM SLIDING DOOR	41
146 SERIES THERMAL BREAK ALUMINUM LIFTING SLIDING DOOR	47
170 SERIES ALUMINUM LIFTING SLIDING DOOR	55
190 SERIES HEAVY LIFTING SYSTEM SLIDING DOOR SERIES TECHNICAL PARAMETER	59
73-65 SERIES THERMAL BREAK ALUMINUM HEAVY DUTY FOLDING DOOR	63
75 SERIES ALUMINUM FOLDING DOOR	67
88 SERIES THERMAL BREAK ALUMINUM FOLDING DOOR	71
68 SERIES THERMAL BREAK ALUMINUM FOLDING DOOR	75
120 SERIES THERMAL BREAK ALUMINUM SLIDING WINDOW WITH NET	79
110 SERIES THERMAL BREAK ALUMINUM CASEMENT WINDOW WITH NET	83
50 SERIES ALUMINUM CASEMENT DOOR	89
75 SERIES THERMAL BREAK SPRING DOOR	93
18 SERIES SLIM FRAME ALUMINUM CASEMENT DOOR	97
100*65 INVISBLE ALUMINUM CURTAIN WALL	101
147*65 THERMAL BREAK ALUMINUM VISIBLE CURTAIN WALL	103
120 SERIES ALUMINUM SUNROOM WITH LIGHT	107
120 SERIES ALUMINUM SUNROOM EUROPEAN-STYLE	110

Contents

70

SERIES

THERMAL BREAK ALUMINUM WINDOW

Profile thickness:

Frame thickness: 1.8mm Fan thickness: 1.8mm

Product configuration:

1、Tilt and turn window:

Width: 520mm–800mm Height: 700mm–1500mm Maximum fan load: 60kg

2、Casement window:

Width: 400mm–800mm Height: 700mm–1500mm Maximum fan load: 60kg

3、When the 70 series is used for casement doors:

Width: 600mm–900mm Height: 1800mm–2400mm

Glass:

5mm+19A+5mm double tempered glass

5mm+27A+5mm double tempered glass

Grills:

70 thermal break casement series are normally square grills or diamond grills (27A hollow)

Blinds:

Built-in manual Blinds or magnetic control Blinds ,electric Blinds

Door and window sashes can be manual Blinds or fixed Blinds. The corners can be 90° and 135°

Basic parameters:



Thermal insulation coefficient:
Uw2.0W/ m² K



Wind resistance coefficient:
+2500Pa



Water tightness coefficient:
+500Pa



Airtightness coefficient:
Level 5



Sound insulation coefficient:
RW up to 30dB

Product description:

1.Material design adopts European standard notch to meet the versatility of accessories on the market

2.Double-layer (5mm+19A+5mm) tempered insulating glass, double-layer sealing, better sealing: it can effectively reduce the acoustic resonance and has a good sound insulation effect

3.Insulating glass can be freely equipped with magnetically controlled hollow louvers and electric louvers, realizing two-way selection of daylighting and shading

4.Various opening styles: outside opening window, inside opening window, Tilt and turn window, top hung window, single casement door, double casement door

HARDWARE CONFIGURATION



Friction stay



Lock cylinder



Wind bracing



Transmission box



Drive rod - lock seat - lock point - connector



Hinge




Lock cylinder cover




Door Handle

70 SERIES THERMAL BREAK ALUMINUM WINDOW

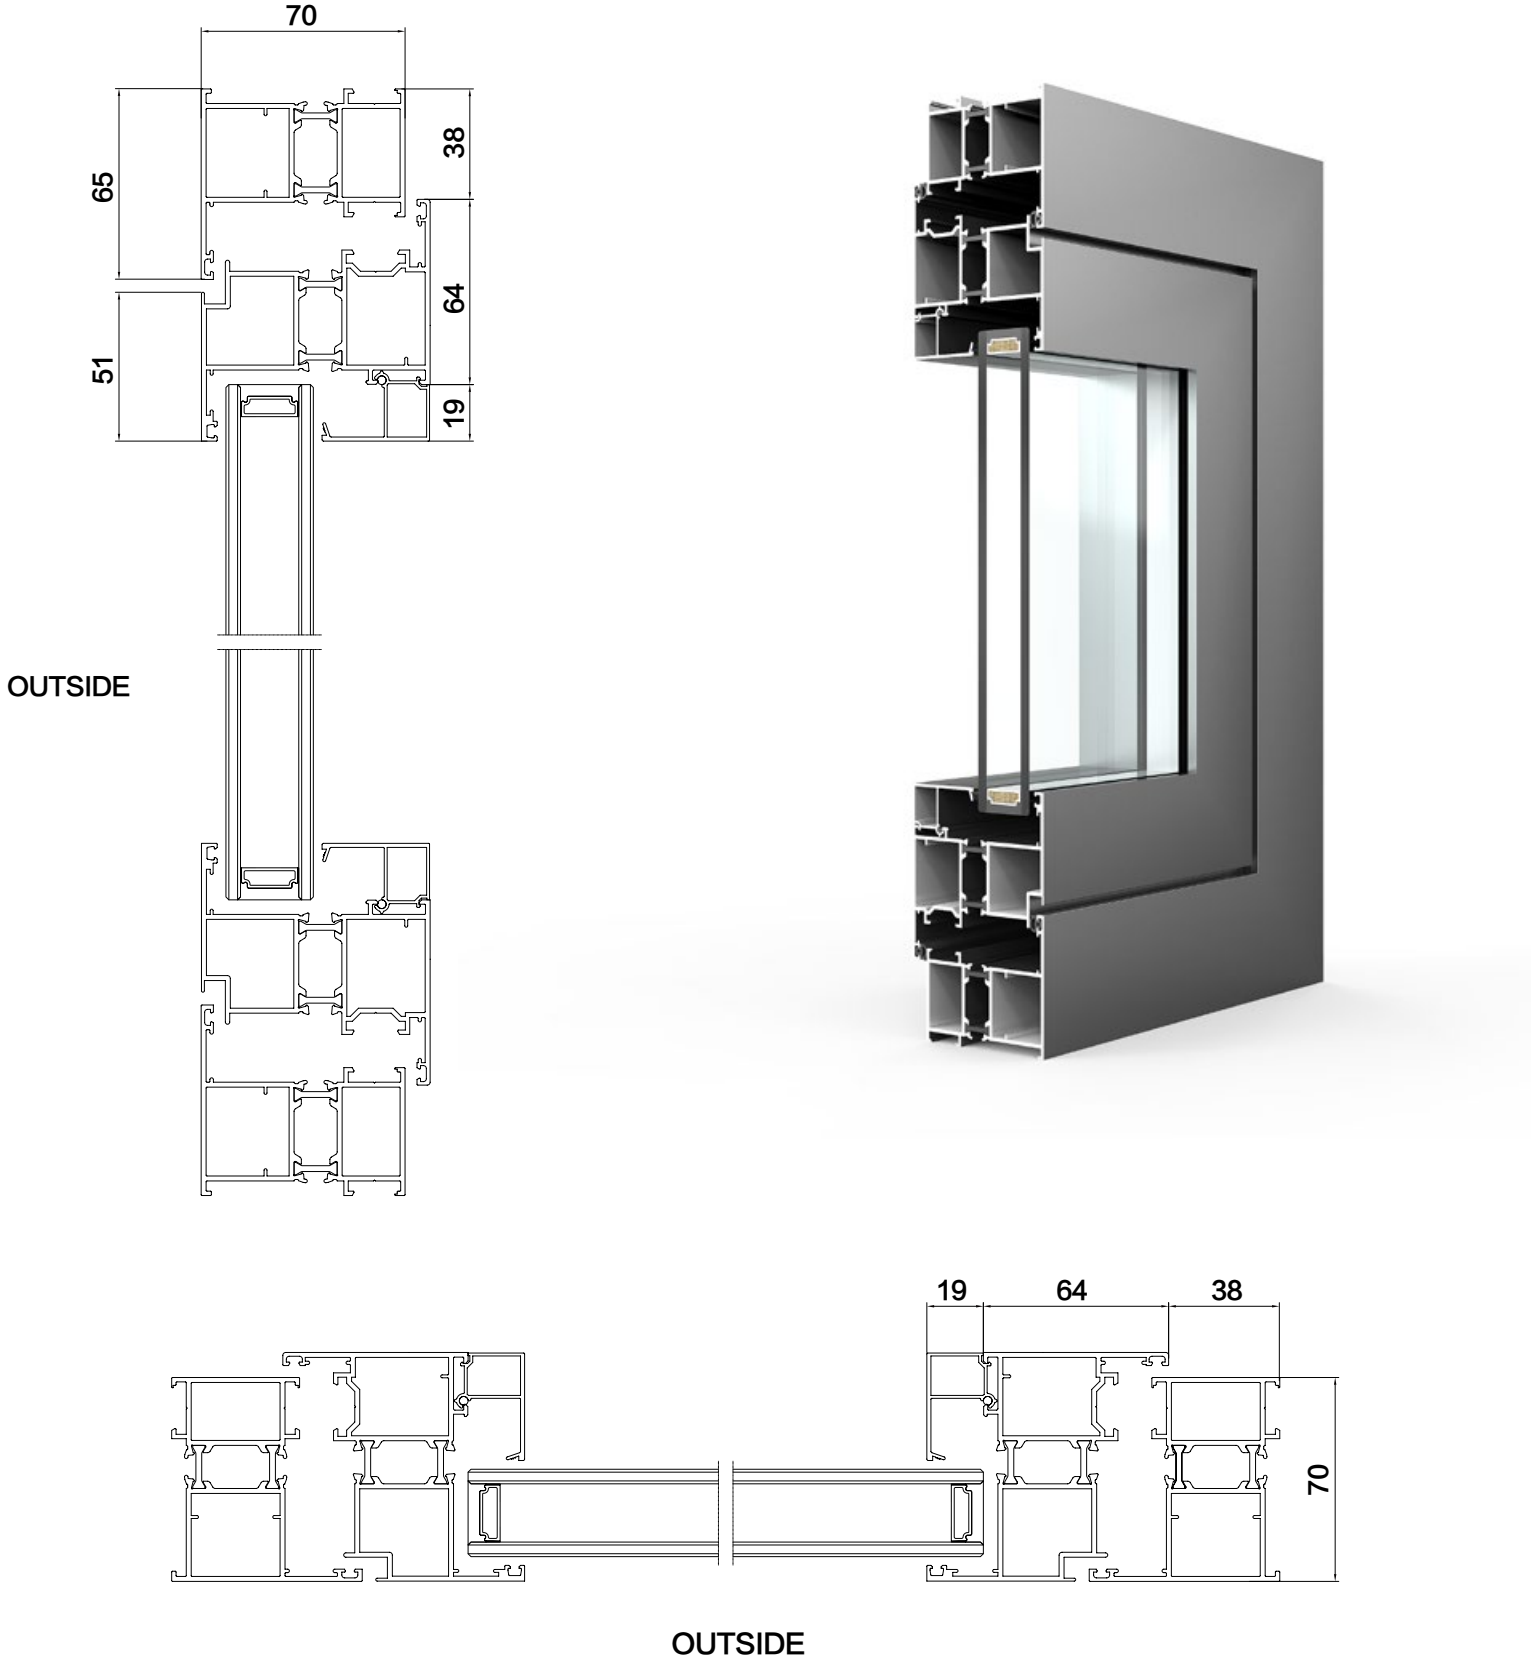



70 SERIES THERMAL BREAK ALUMINUM WINDOW

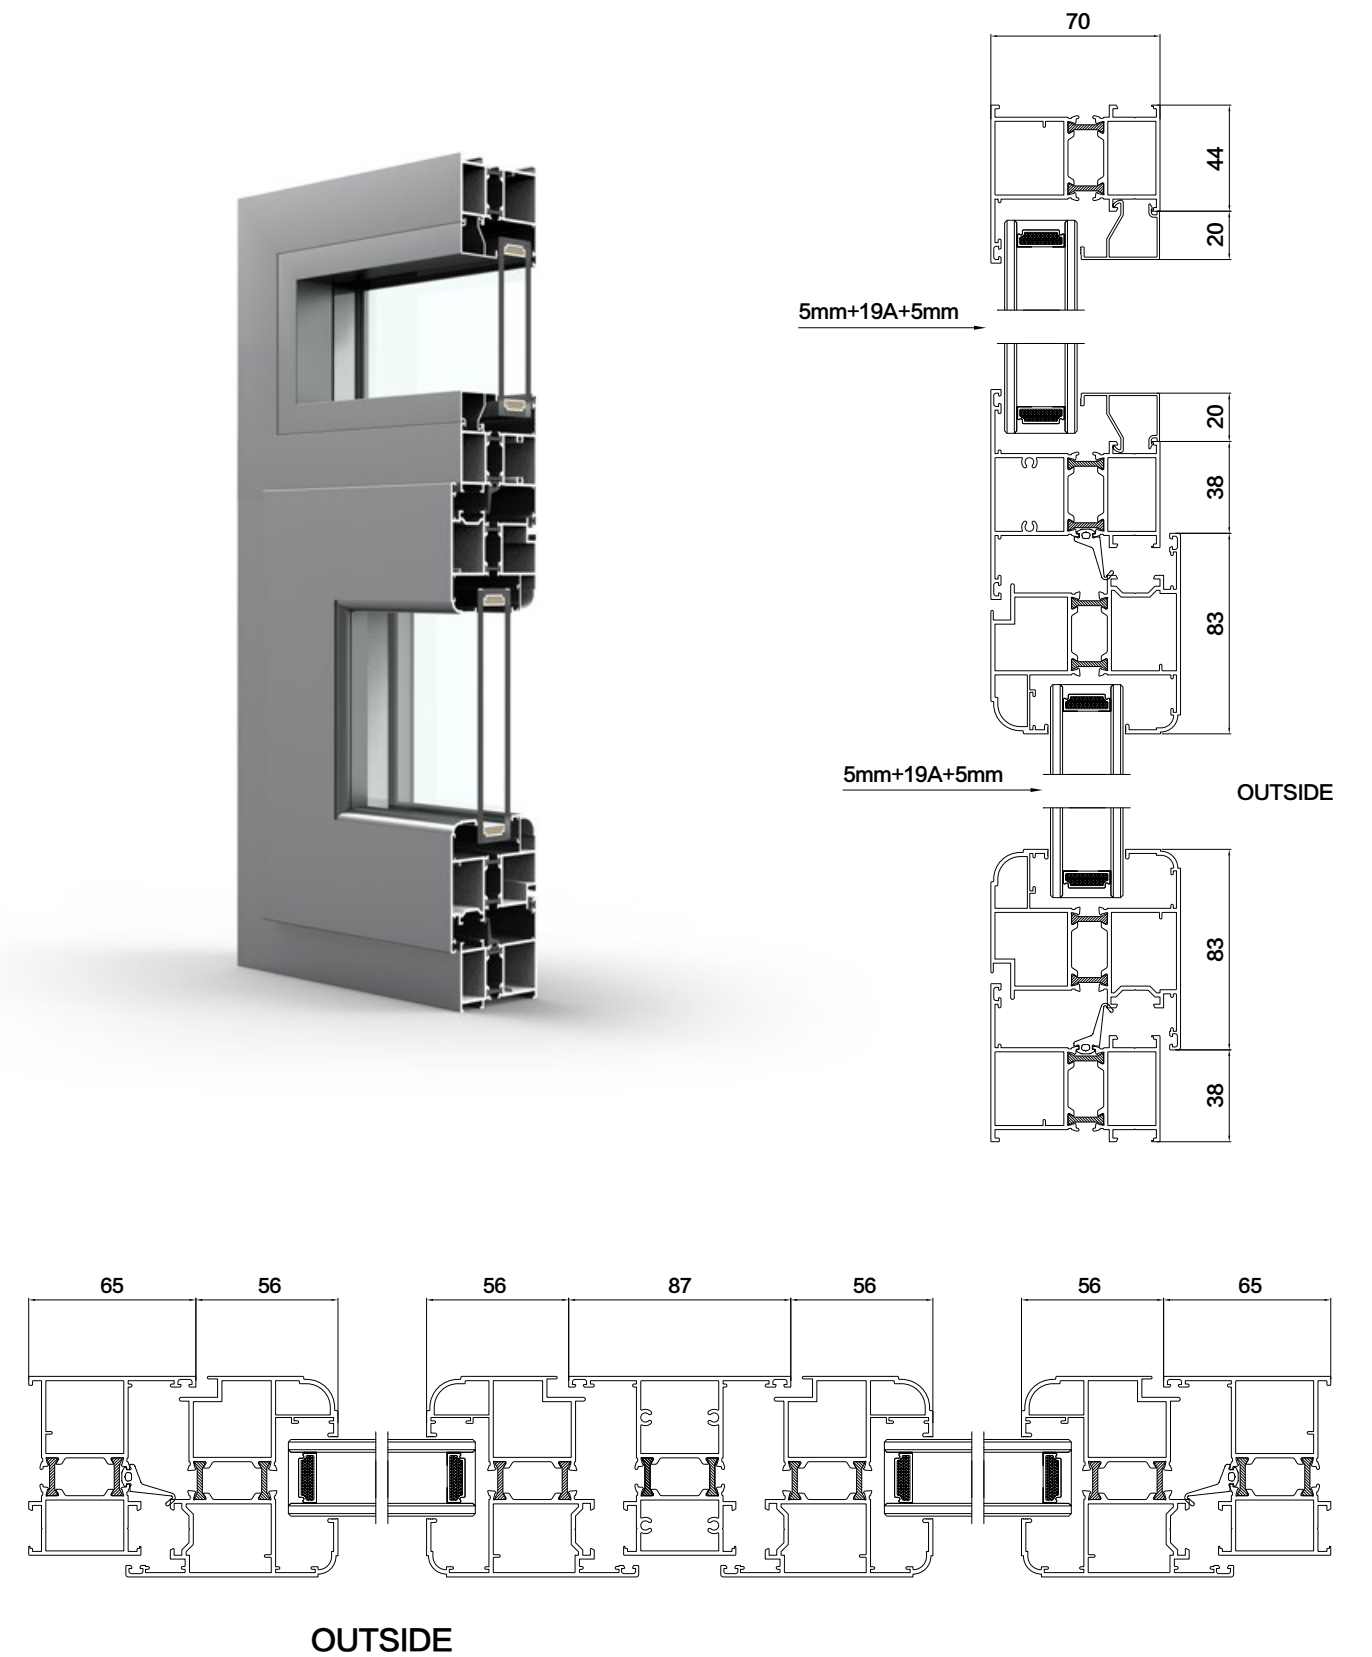

DURABLE AND SAFE

K80

SERIES

THERMAL BREAK ALUMINUM WINDOW

Profile thickness:

Window fan thickness 1.8mm Door frame thickness: 1.8mm Door fan thickness: 2.0mm

Specifications:

Fan width:400mm – 800mm Fan height:400mm – 1900mm Maximum fan load: 60kg

Glass:

5mm+16A+5mm+12A+5mm hollow, broken edge can be made 8mm+27A+8mm, also can be made double glass 5mm+27A+5mm

Insulation strip size:

35.3mm multi-cavity insulation strip

Basic parameters:



Watertight performance
AS/NZS4420.1 standard:
600Pa



Wind pressure resistance
AS/NZS4420.1 standard:
±4000Pa



Airtightness coefficient:
Level 5



Sound insulation performance
ISO717 standard:
Rw37dB



Thermal insulation performance
AS/NZS4420.1 standard:
Uw1.4W/m2K

Product description:

- 1.The product uses standard 35.3 insulation strips and three-glass two-cavity structural glass, which effectively guarantees the product's thermal insulation and sound insulation functions.
- 2.1.8mm international profile thickness, standard German process design, make the product air tightness, water tightness, and wind pressure resistance performance effectively reflected.
- 3.The internal cavities of the frame, stile, and fan are all designed with rectangular cavity, with glue-injected corner brace connectors, the connection is firmer and the structure is more stable. The glass bead is a cavity structure, which is not easy to deform.
- 4.It adopts an intermediate sealing structure,divide the glass into two parts: drainage cavity and sealed cavity, to prevent the hidden danger of poor sealing at the sealing position.

HARDWARE CONFIGURATION



Friction stay



Hinge



Drive rod + lock seat + lock block




Lock body




Anti falling chain

K80 SERIES THERMAL BREAK ALUMINUM WINDOW

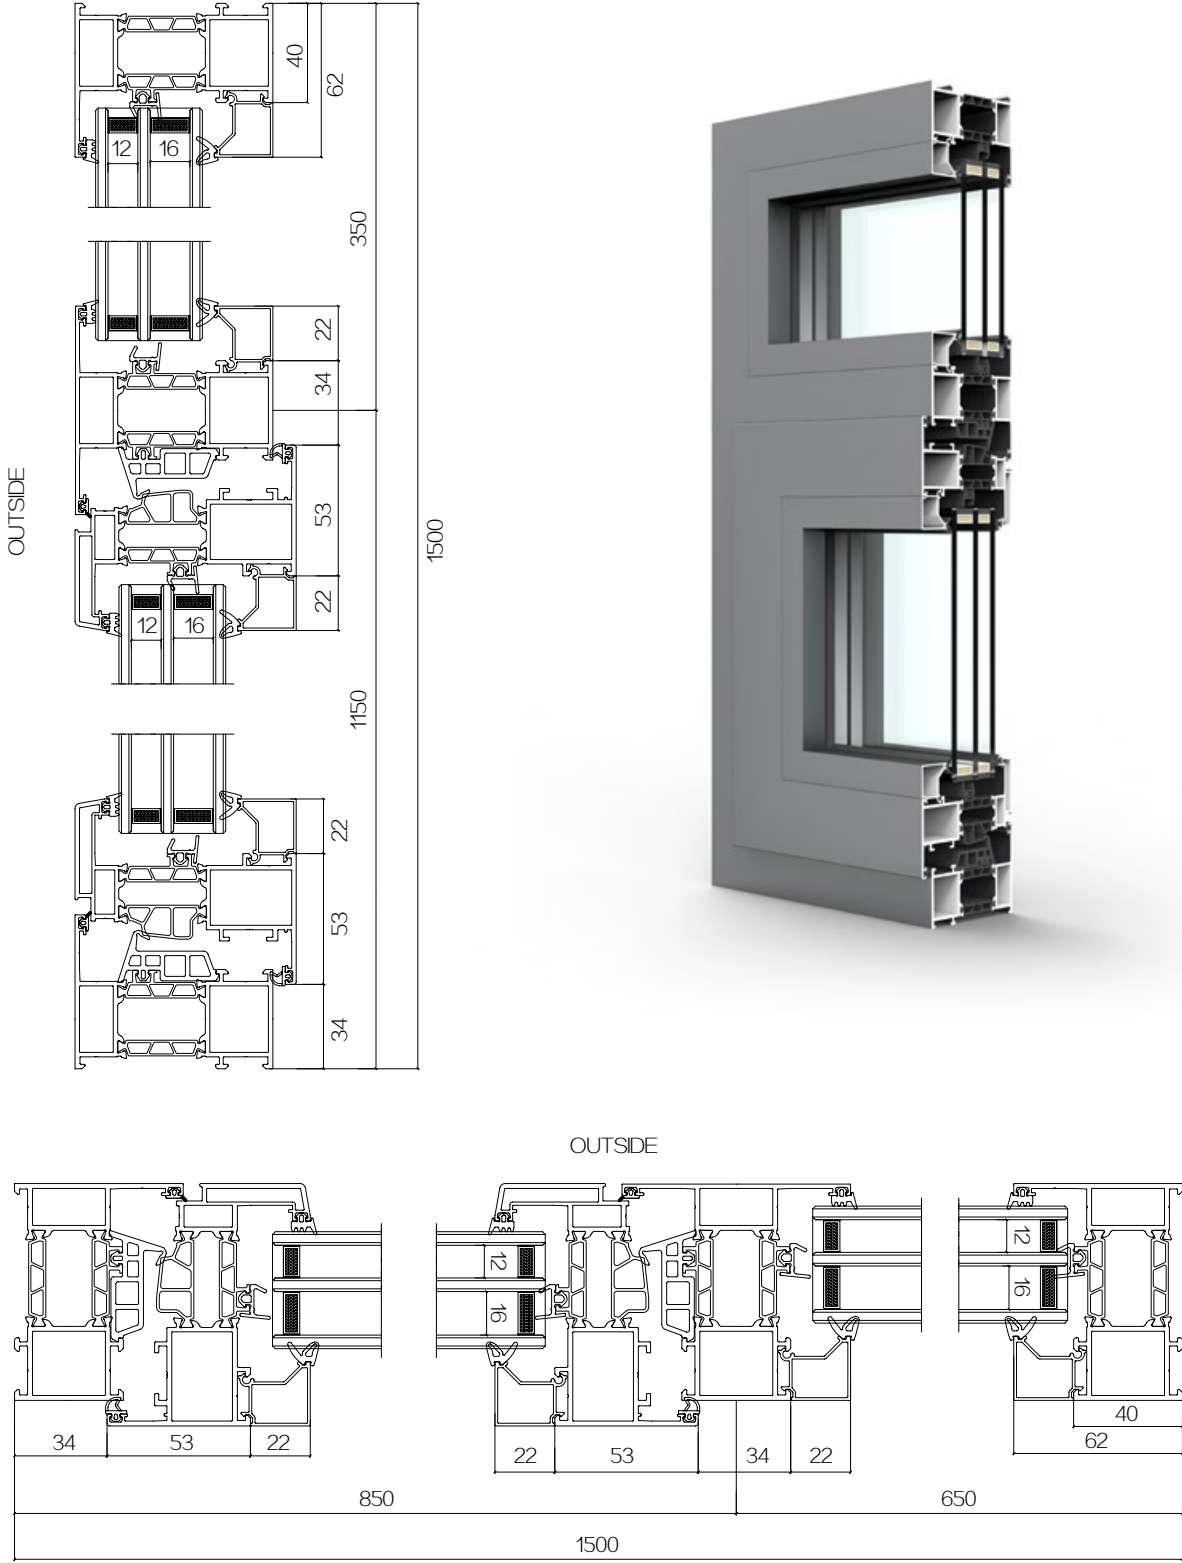

Product details

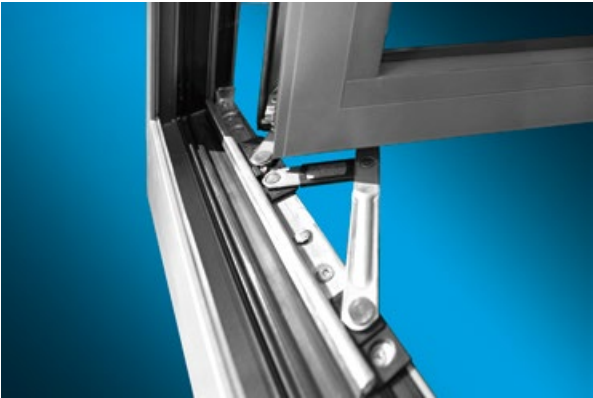


PRODUCT
PERFORMANCE

DRAINAGE SYSTEM

**Independent
Drainage design**

The frame and fan independent drainage system design improves the water tightness of the whole window, and the overall design is simple and elegant.

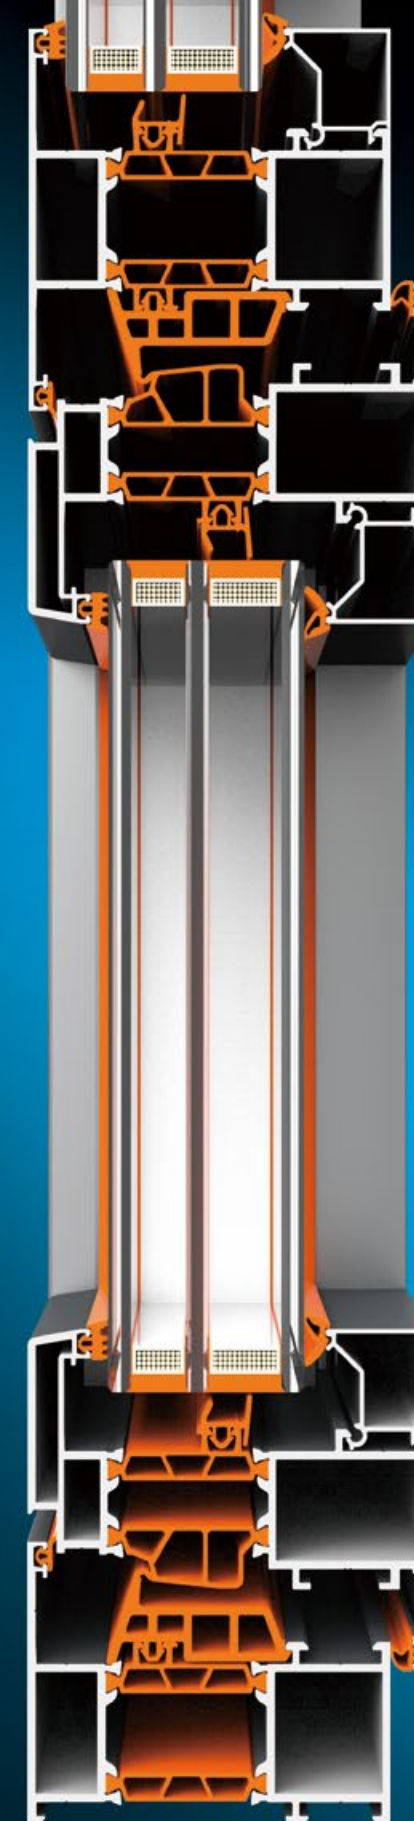

PA66 nylon insulation strip adopts German advanced precision extrusion technology. It has excellent mechanical strength and good weather resistance, resistance to ultraviolet ray aging, acid and alkali corrosion, and has obvious effects of heat preservation, sound insulation and energy saving.

Profile


sealing structure

The German standard process design makes the product air tightness, water tightness, and wind pressure resistance performance effective.

The internal cavities of the frame, stile, and fan are all designed with a rectangular cavity, and the glass pressing line is a cavity structure, which is not easy to deform.

Insulation system

K80 SERIES THERMAL BREAK ALUMINUM WINDOW

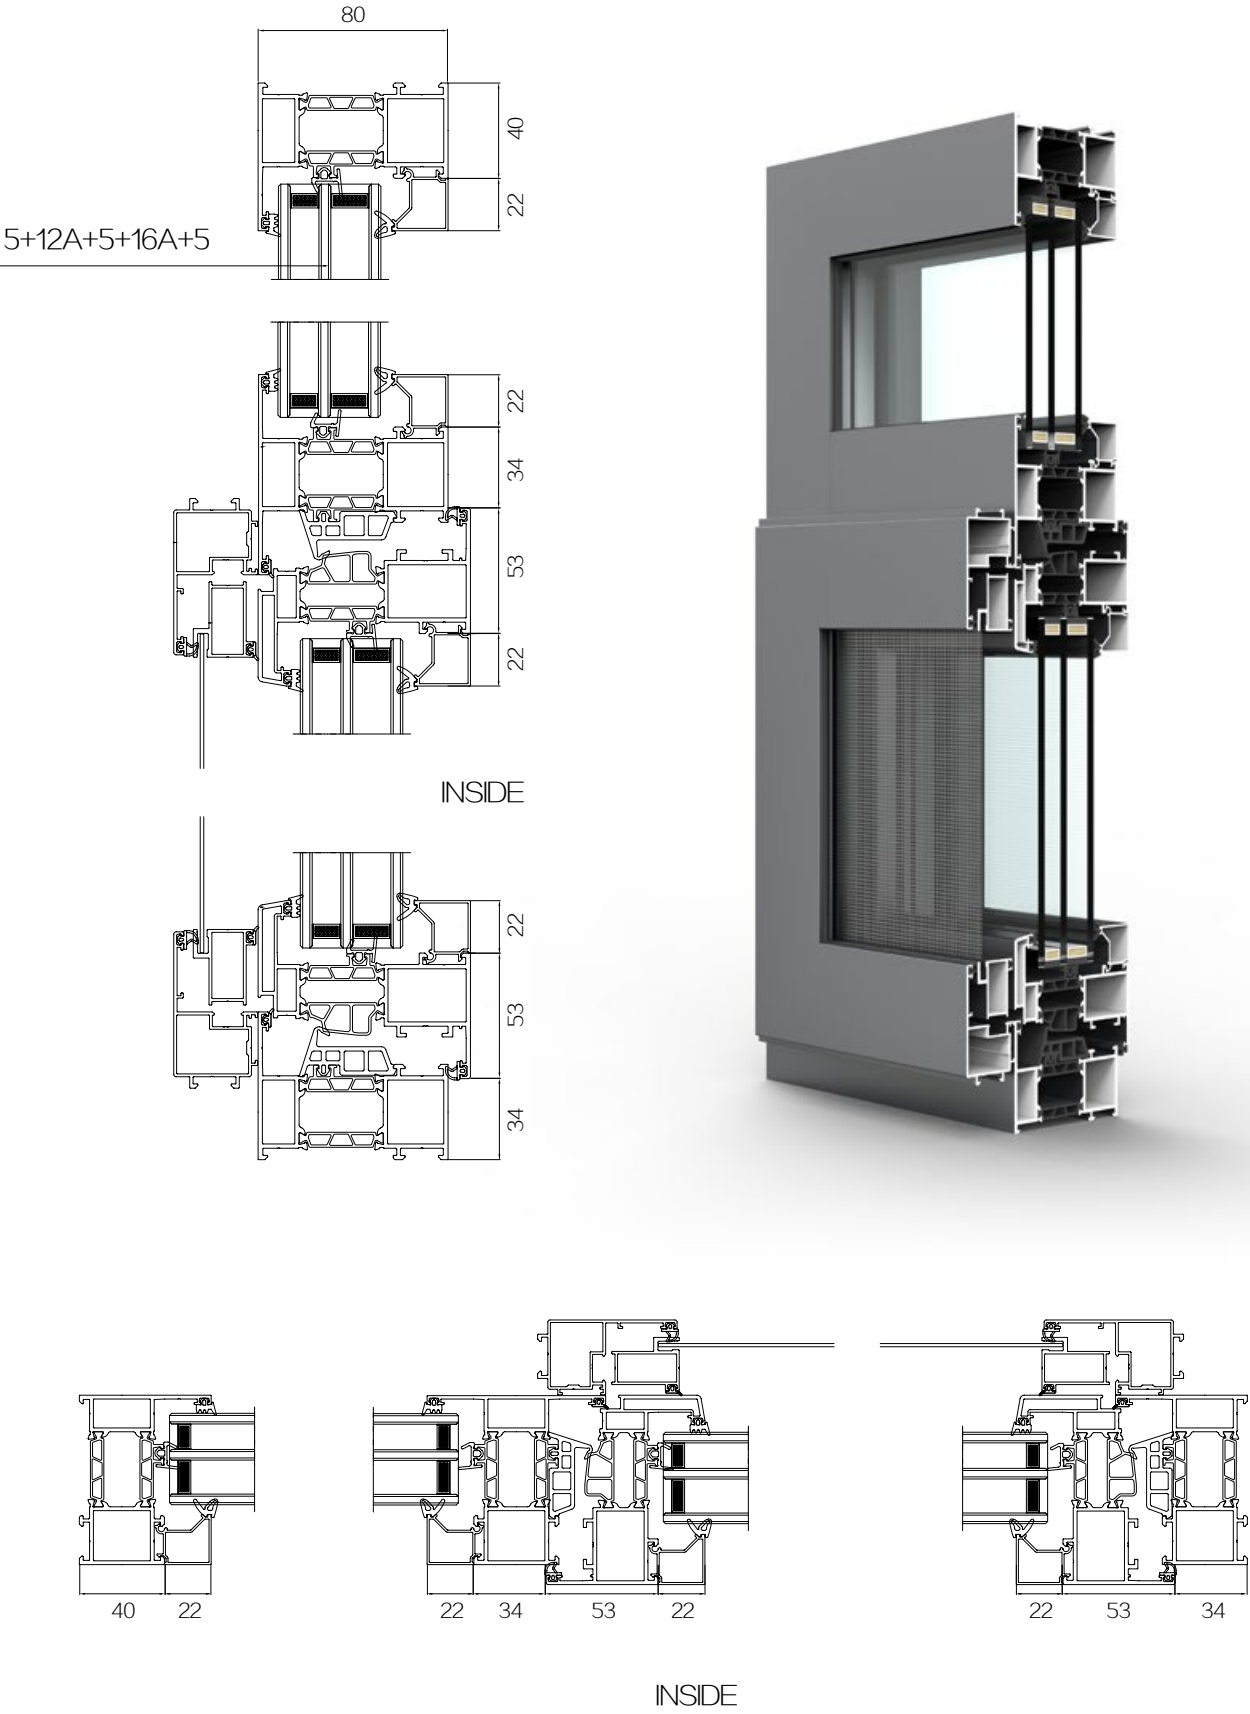


Product details



Simple home life

Create a simple and stylish look. And through the texture of materials and fine craftsmanship to meet the pursuit of high-quality home life.
The colors are elegant, clean and lively, and leisure and luxury create a strong sense of design.

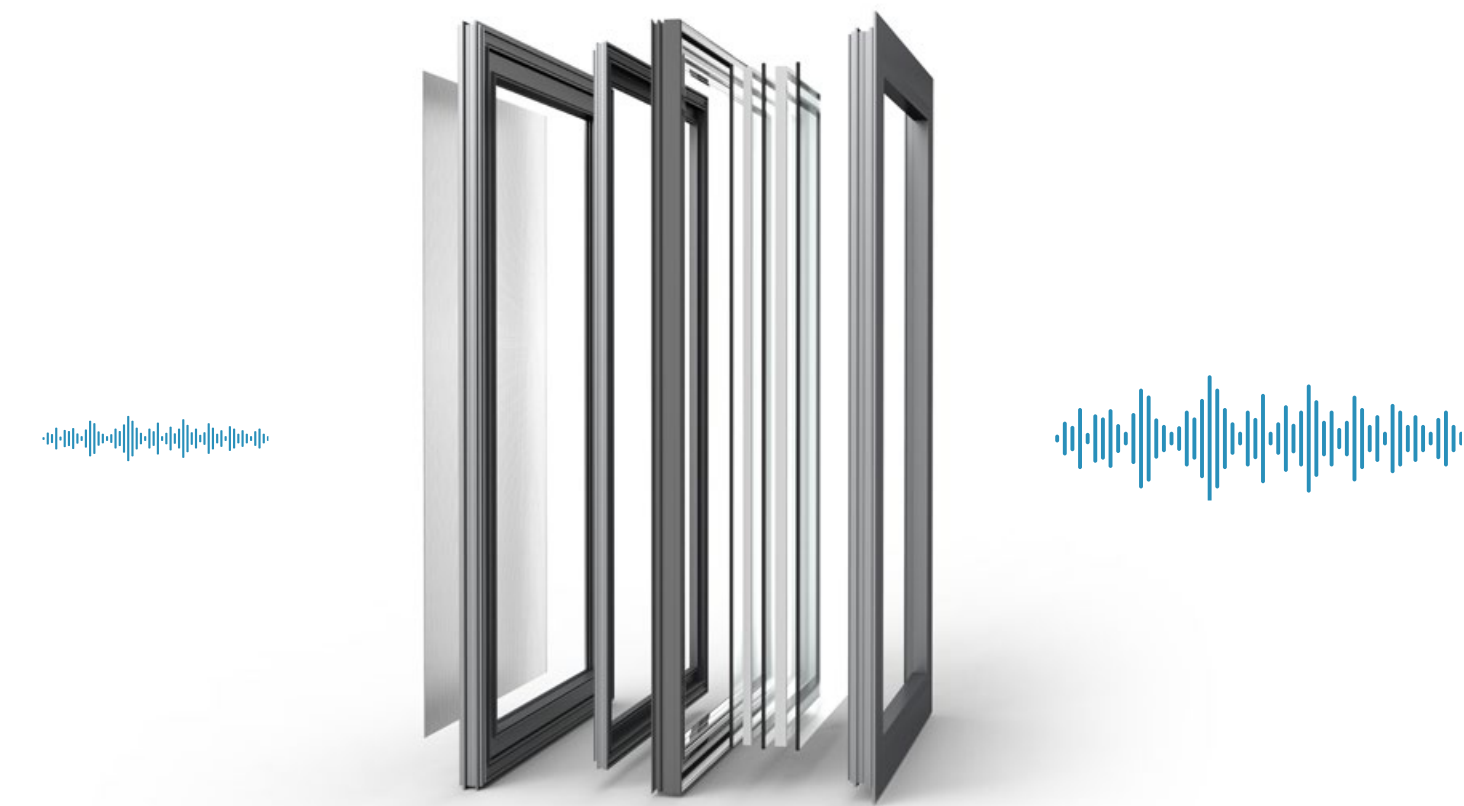


Sound insulation System

Standard three-glass two-cavity hollow tempered glass,
Combined with multi-cavity foamed composite isobar,
Improve sound insulation performance,
Let you enjoy deep sleep at ease.

Super sound insulation up to
40dB





K80 SERIES THERMAL BREAK ALUMINUM WINDOW

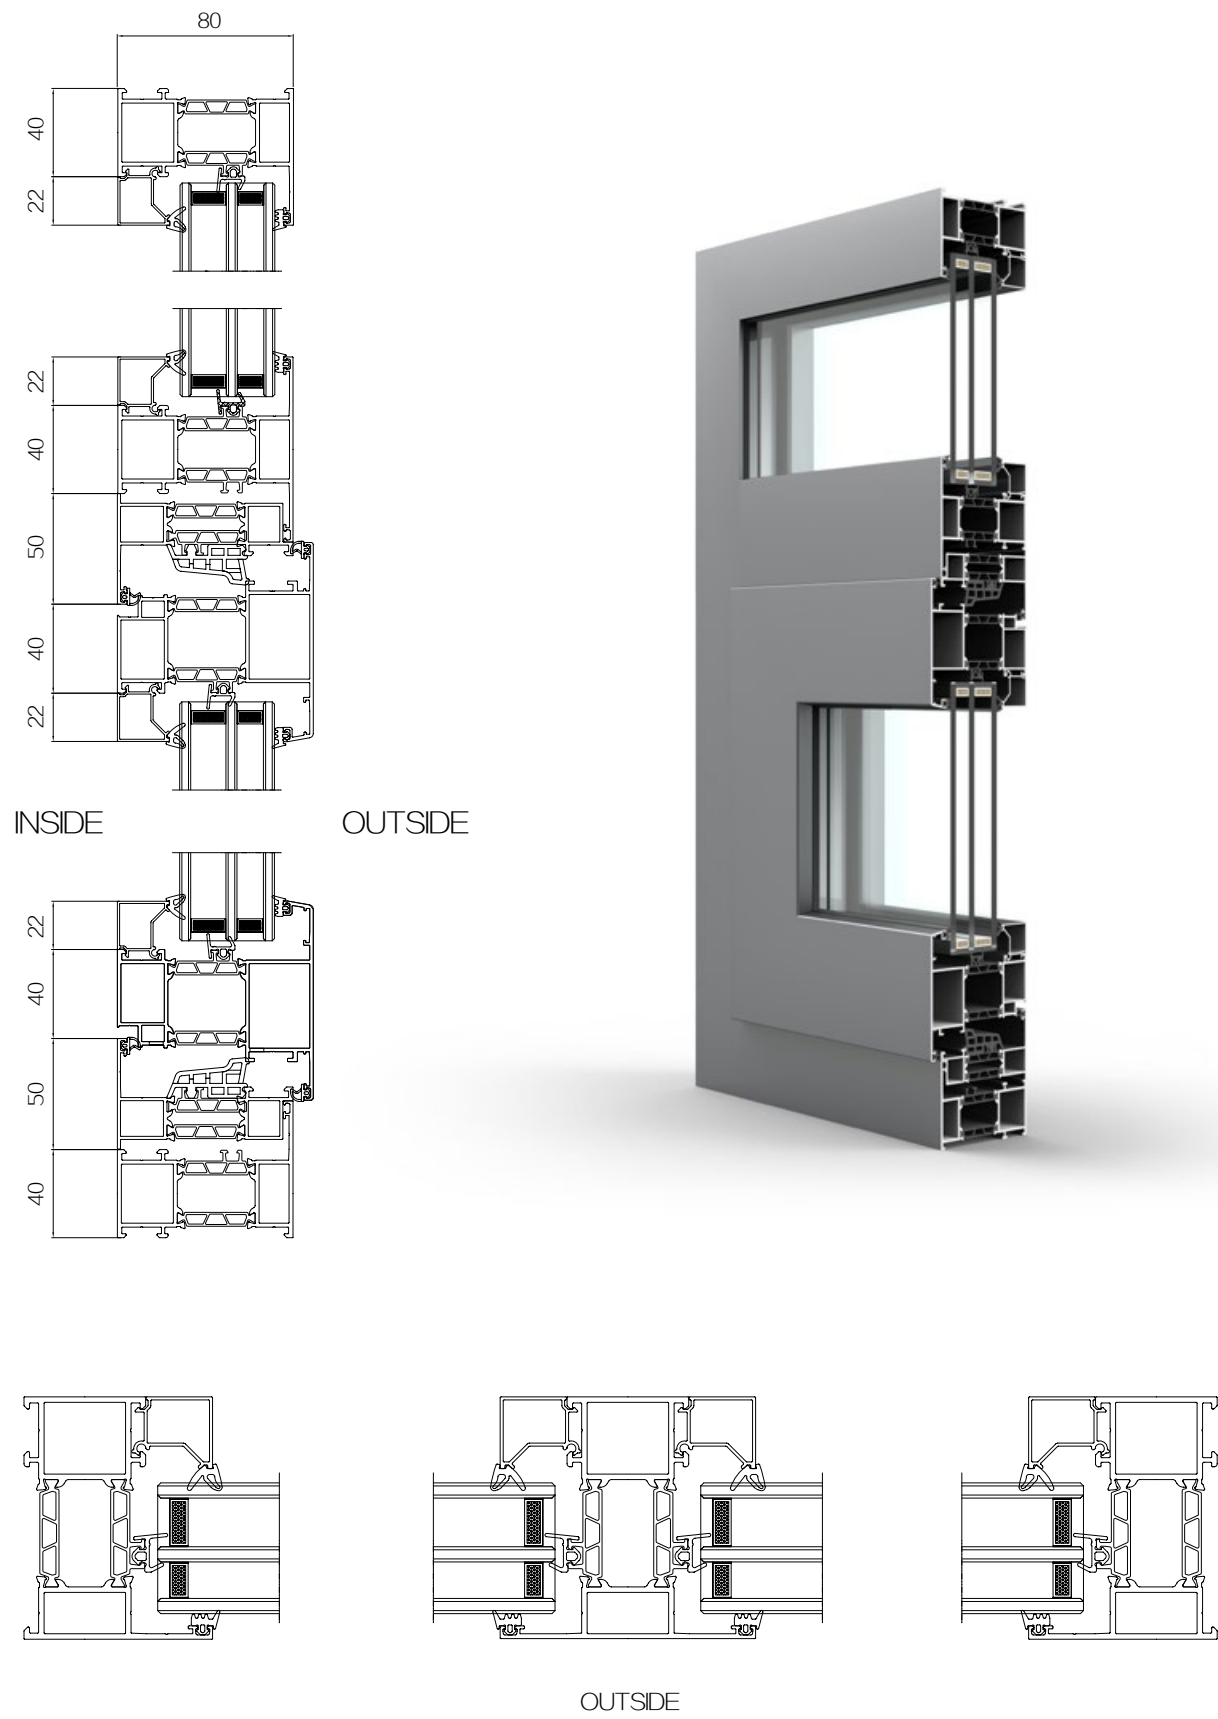

DURAMAX
BUILDING MATERIALS

K80 SERIES THERMAL BREAK ALUMINUM WINDOW

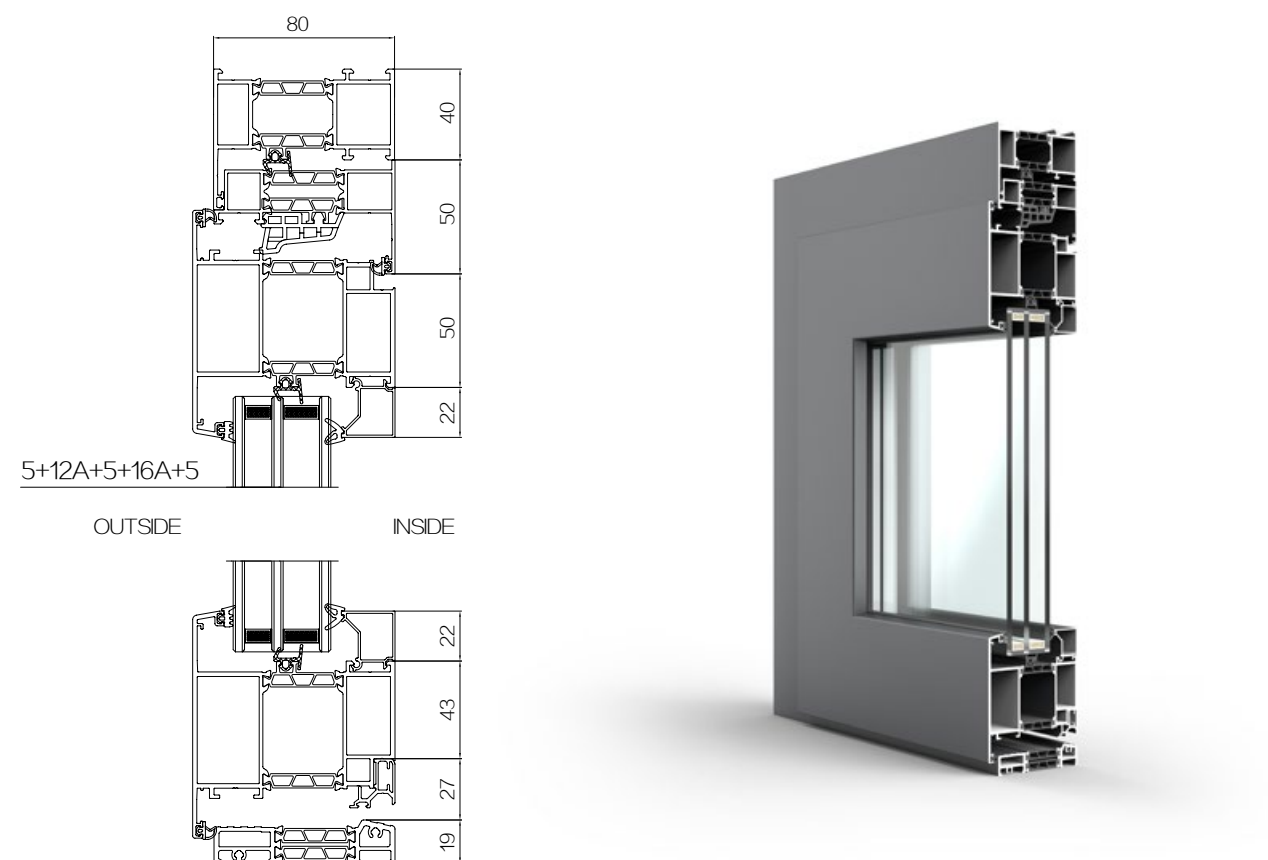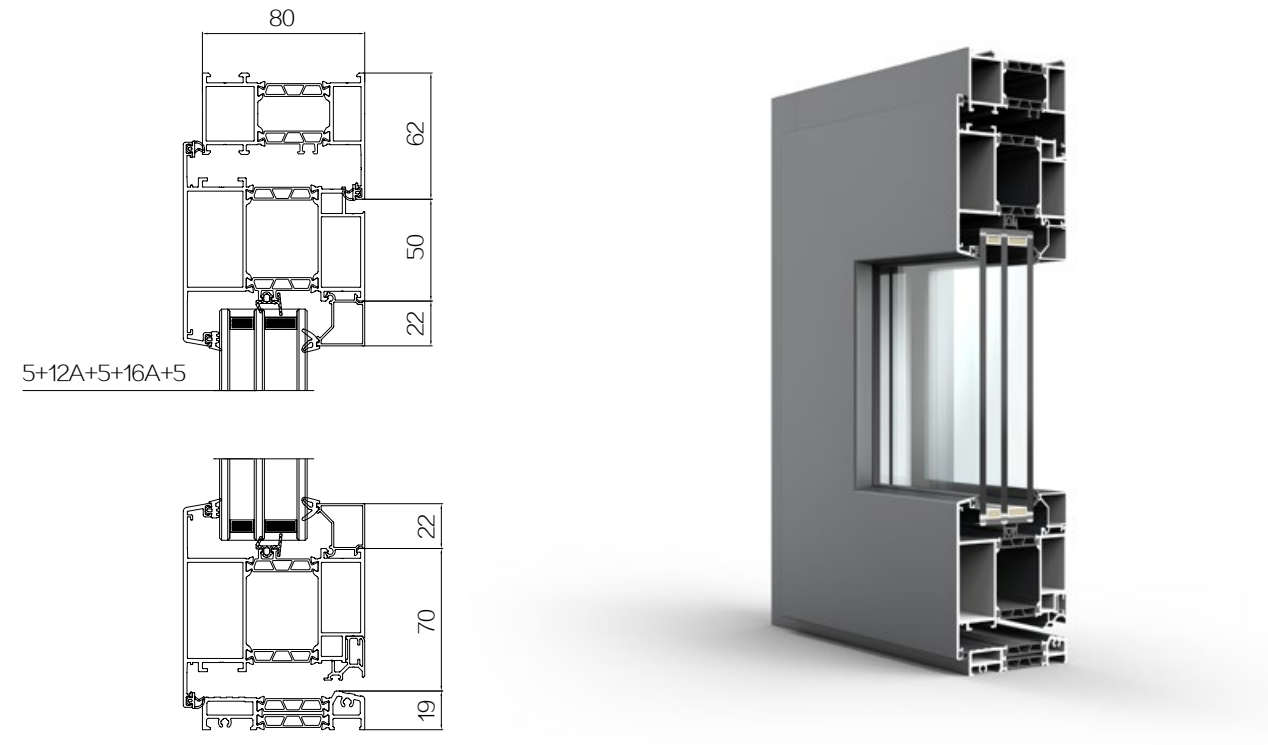

CASEMENT DOORS SERIES

The door frame and door leaf are all spliced at a 45-degree angle, with glue-injected corner code connectors, the connection is firmer and the structure is more stable. The structure of the middle seal is adopted, and the glass is divided into two parts, the drainage cavity and the sealed cavity, to prevent the hidden danger of poor sealing at the sealing position.

35.3
Standard heat insulation strip

1.8mm
German craft profile



PRODUCT DETAILS



91 SERIES THERMAL BREAK ALUMINUM CASEMENT WINDOW

Technical Parameters: Profile: 6060-T66 aluminum / thickness 1.8mm, local reinforcement 2.0mm.

Heat insulation strip:

PA66-GF25-S54 high-quality heat insulation strip / standard configuration of heat insulation chamber filled with polyurethane sponge.

Rubber strip:

high-performance EPDM foam composite sealing strip, standard soft and hard composite co-extruded isobaric rubber strip

Profile thickness: outer frame width is 91mm, heat insulation strip is 54mm; panel width is 100mm, heat insulation strip is 54mm.

Visible surface: outer frame is 39mm / middle pole is 39mm / opening panel is 57mm.

Applicable size: open panel width: 600mm-800mm,height: 600mm-2400mm maximum weight: 80kg

Glass configuration: 5mm+16A+5mm+16A+5mm

Opening method: glass panel: open to inside/tilt and turn inside/ top-hung window open to inside/bottom-hung window open to inside

Basic parameters:



Watertight performance
AS/NZS44201 standard:
600Pa



Wind pressure resistance
AS/NZS4420.1 standard:
± 4000Pa



Airtightness coefficient:
Level 5




Sound insulation performance
ISO717 standard:
Rw37dB




Thermal insulation performance
AS/NZS44201 standard:
Uw1.4W/m2K

Product description:

- 1.The glass panel and net panel all open to inside.The standard configuration is hidden drainage. Only the lower frame need drainage positions to have drainage grooves. The flow of rainwater is planned so that the rainwater can be smoothly discharged to the outside. , thereby improving the watertight performance of the entire window. The windows are more beautiful, and the standard drainage hole cover can prevent mosquitoes and insects.
2. The inside of the panel is equipped with rounded corners as standard, and the outside is equipped with safety corner protection, anti-collision, have double protection.
3. Isotherm design, standard configuration filled with polyurethane sponge, reducing heat convection, higher thermal insulation performance
4. Three seals are used to improve the airtightness, watertightness and thermal insulation performance of the whole window and prevent the intrusion of sand and dust.
5. The outside of the glass adopts soft and hard co-extruded composite rubber strips, which have good ability to absorb compression deformation, lower heat transfer coefficient, and the dense layer is closer to the outer side for better sealing effect.
6. Adopt 54mm special-shaped heat insulation strip, and the cavity of the heat insulation strip is made of thermal insulation closed-cell sponge, which can effectively improve the heat convection and heat radiation in the chamber of the heat insulation strip; the foam material is used between the glass and the profile to reduce the Heat radiation and convection in small gaps reduce the linear heat transfer coefficient of glass and profiles. Improve the insulation performance of the whole window.
7. The corners are made of die-cast aluminum corners with high precision; there are two connection methods: bumping the corners or fixing with screws; the two-component corner glue forms a ring seal at the corners to enhance the connection strength and sealing of the corners

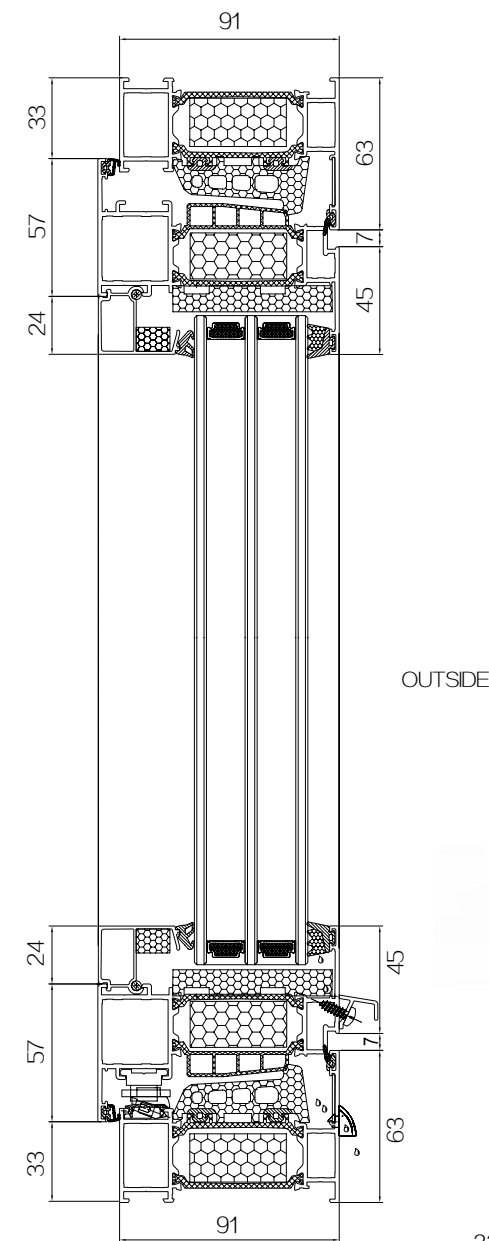

OUTSIDE

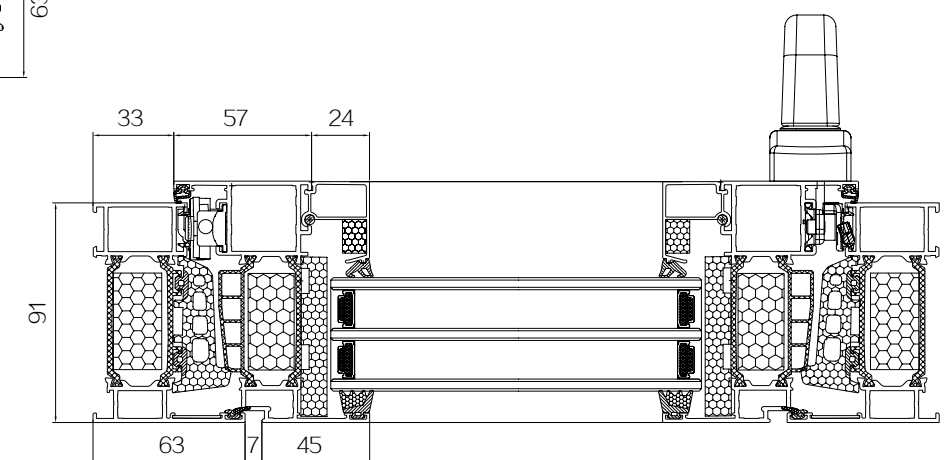

OUTSIDE



PRODUCT DETAILS



96 SERIES
ALUMINUM SLIDING DOOR

Profile thickness:

Frame thickness: 1.4mm Fan thickness: 1.4mm

Product configuration:

The maximum size of single fan can be made:
fan width ≤ 1300mm fan height ≤ 2600mm maximum fan weight: 80kg

Glass:

5mm + 12A +5mm double layer tempered insulating glass

Grills:normal square grills

- 1.304 stainless steel net, standard color is black, silver color is optional
- 2.The 96 series is equipped with stainless steel rails for doors, and aluminum alloy rails for windows.
- 3.96 series two-track and three-track can be selected: high track or low track
- 4.The corner angle can be 90° and 135°

Basic parameters:



Thermal insulation coefficient:
Uw25W/m2K



Wind pressure resistance coefficient:
+2000Pa



Water tightness coefficient:
+300Pa



Air tightness coefficient:
Level 3




Sound insulation coefficient:
Rw up to 25dB


Product description:

- 1.The cavity adopts EPDM sealing tape, which is not easy to age and is durable, and achieves a more comprehensive sealing effect.
- 2.Equipped with 5+12A+5 hollow tempered glass, it can effectively reduce the resonance effect of sound waves, and has a good sound insulation effect and complete functions.
- 3.Sliding fly screen/mosquito net can be added: it can be placed indoors and outdoors.


Three track two + screen door




Three rails and three fans




Three rails and four leaves + screen door



Two rails and three fans



Two rails and two fans



Two rails and four leaves + screen door



HARDWARE CONFIGURATION



—— Multipoint lock ——



—— Lock cylinder ——



—— Lock bag five piece set ——



—— Anti swing wheel ——



—— Lock body ——




—— Pulley double wheel ——






—— Lock cylinder cover ——




—— Frame panel ——

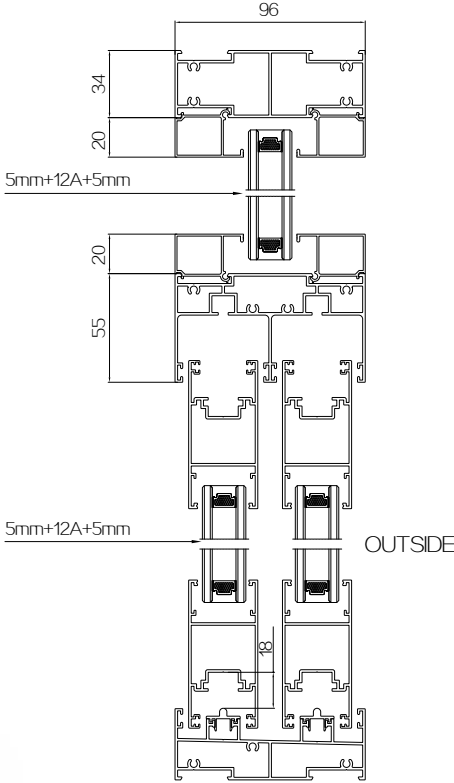


PRODUCT
DETAILS

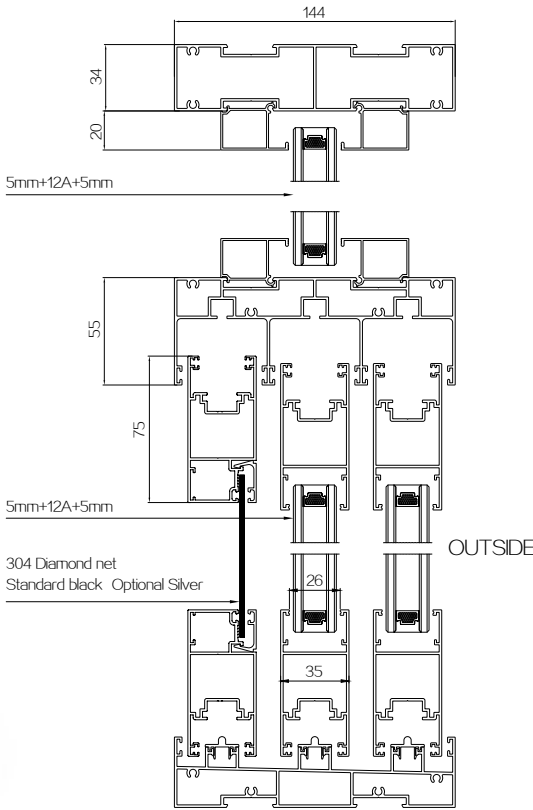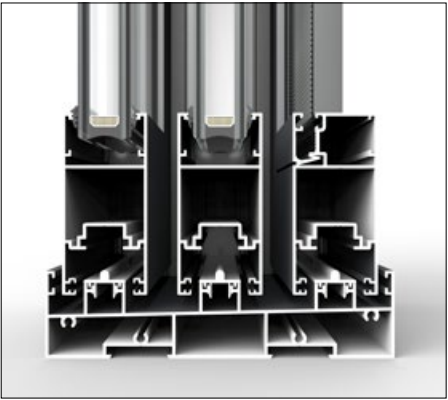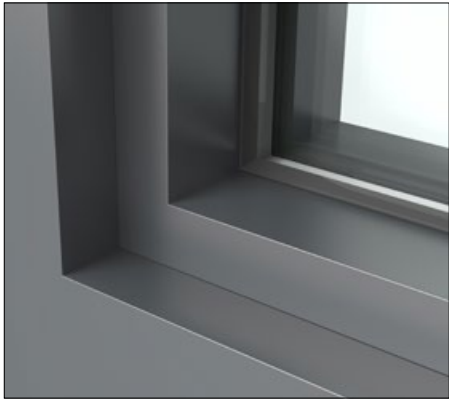

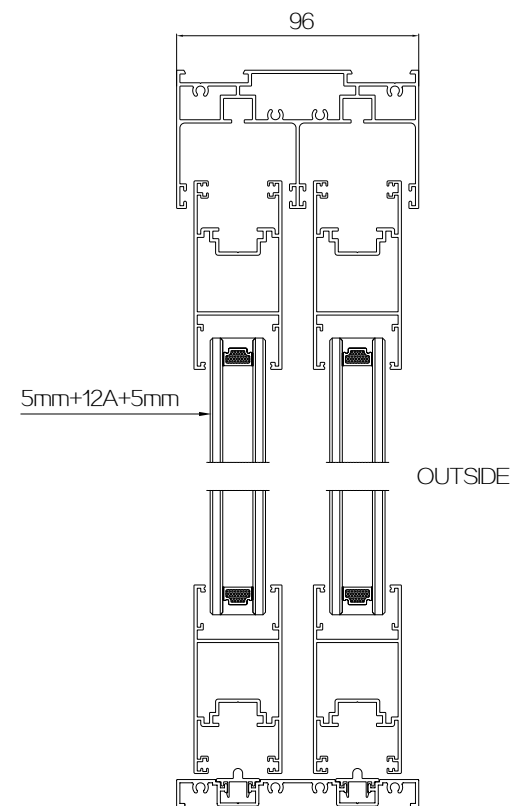

Space Aesthetics

Space realizes art, and art pursues life simple, bright and elegant,
exuding an uncompromising sense of high-level inside,Outside the window is a jungle-like picture,
and there is a warm and strong fragrance in the room. When you rest, you can recall the time that has passed.

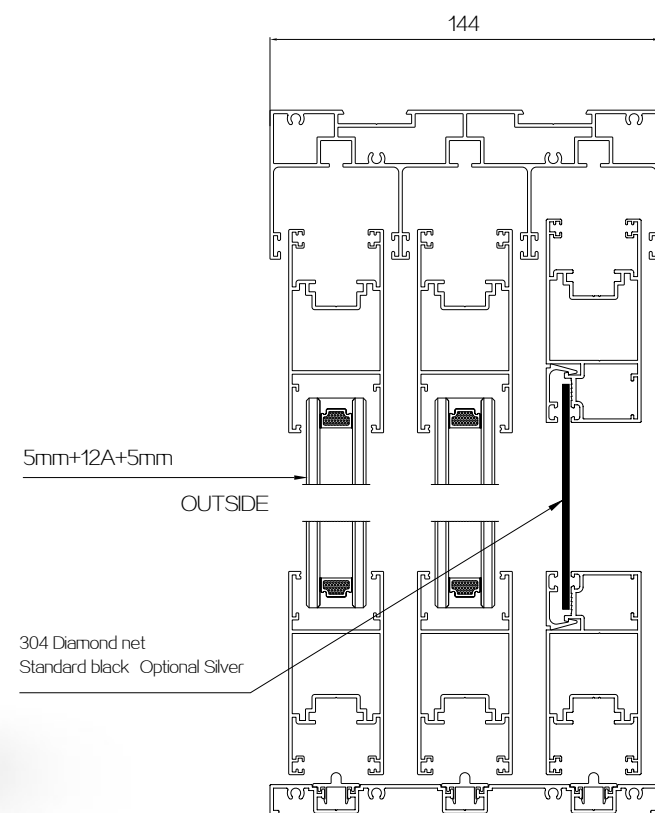

130

SERIES

ALUMINUM SLIDING DOOR

Profile thickness:

frame thickness: 1.8mm fan thickness:1.8mm

Product configuration:

The maximum size of single fan can be made: fan width ≤ 1500mm, fan height ≤ 2800mm, maximum fan weight: 80kg

Glass:

5mm+16A+5mm double-layer tempered insulating glass

Material broken edges can be made into double tempered hollow glass of 5MM+27A+5MM

Grills: The new 130 series are conventionally square or diamond-shaped large grid strips with 27A hollow strips

Blinds: Electric blinds and magnetic blinds are available for the new 130 series

1. 130 series with 304 stainless steel net, standard color is black, silver color is optional
2. Standard stainless steel track for 130 sliding door series track The corner angle can be 90° and 135°

Basic parameters:



Thermal insulation coefficient:
Uw2.0W/m2K



Wind pressure resistance coefficient:
±2000Pa



Water tightness coefficient:
500Pa



Air-tightness coefficient:
Class 3




Sound insulation coefficient:
Rw up to 25dB


Product description:

- 1.1.8mm international profile thickness, standard German process design, make the product air tightness, water tightness and wind pressure resistance performance effectively reflected.
- 2.It can realize the double-track and three-track, and it can be opened flexibly. There are various styles and the design style is simple and atmospheric.
- 3.The profile design adopts European standard hardware notches and multi-point locks to meet the versatility of accessories on the market and achieve a good anti-theft effect.
- 4.Complete functions, mosquito net can be placed indoors and outdoors.
- 5.Hollow glass can be freely equipped with magnetic blinds and electric blinds, realizing two-way selection of daylighting and shading


Three rails and three fans




Three rails and two leaves + screen door




Two rails and three fans





Three rails and four leaves + screen door



Two rails and two fans



Two rails and four fans



HARDWARE CONFIGURATION



Lock cylinder




Multipoint lock



handle



Lock bag five piece set

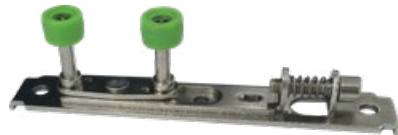

Anti swing wheel



Handle fixing screw



Lock body



Pulley double wheel



Lock cylinder cover




Frame panel




OPK
Buffers and accessories


130 SERIES ALUMINUM SLIDING DOOR

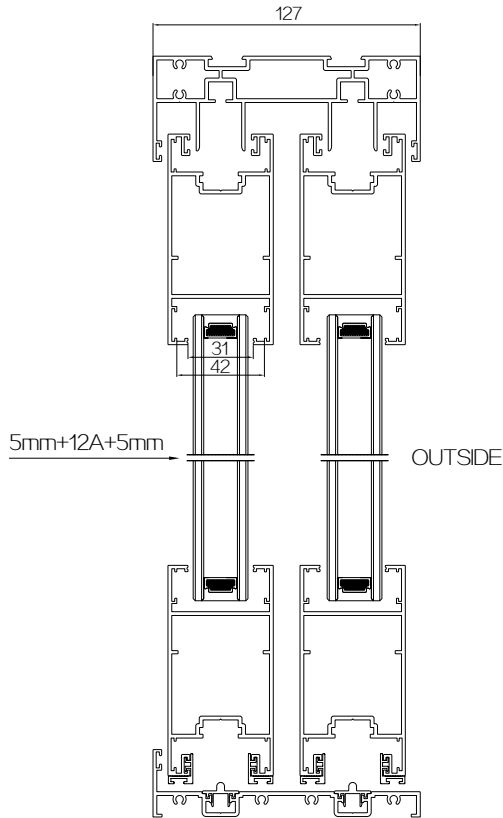

Low rail without retaining edge

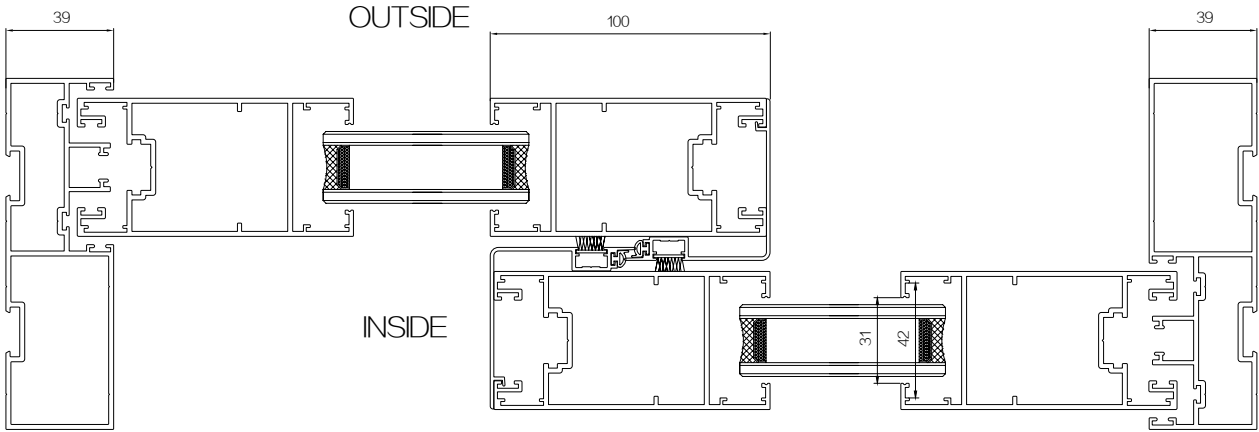



PRODUCT
DETAILS

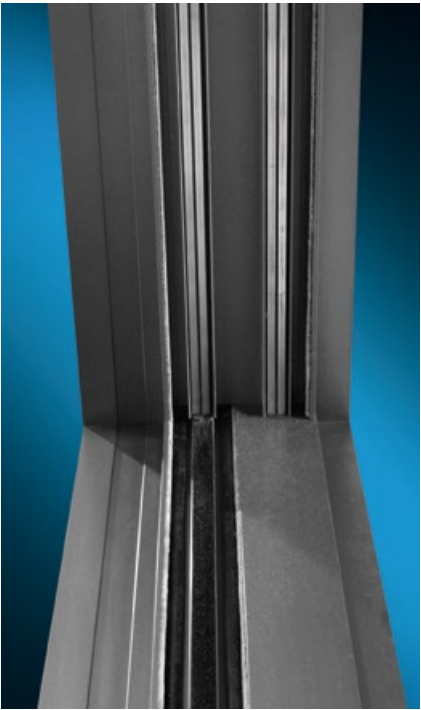

In terms of professional quality,
the application of artistic aesthetics was entrusted to an environmental manager.
From art to life, follow the inner voice,
return to simplicity and nature, and let life and beauty meet unexpectedly.



130 SERIES ALUMINUM SLIDING DOOR

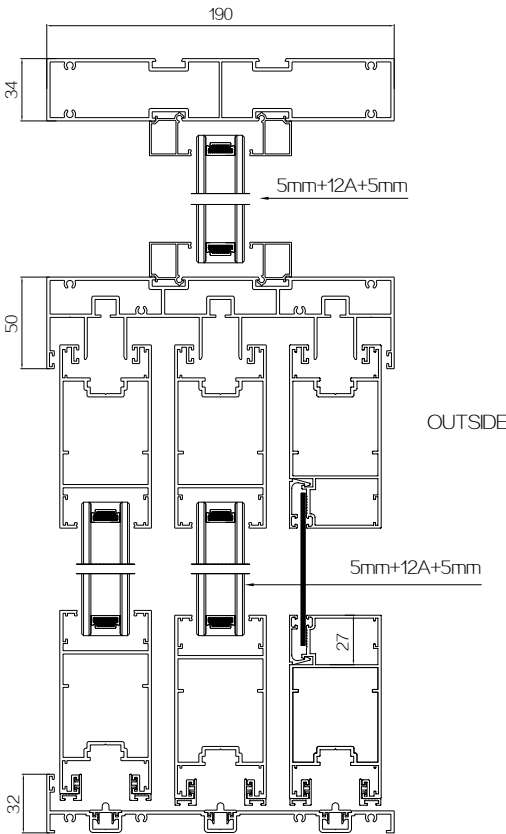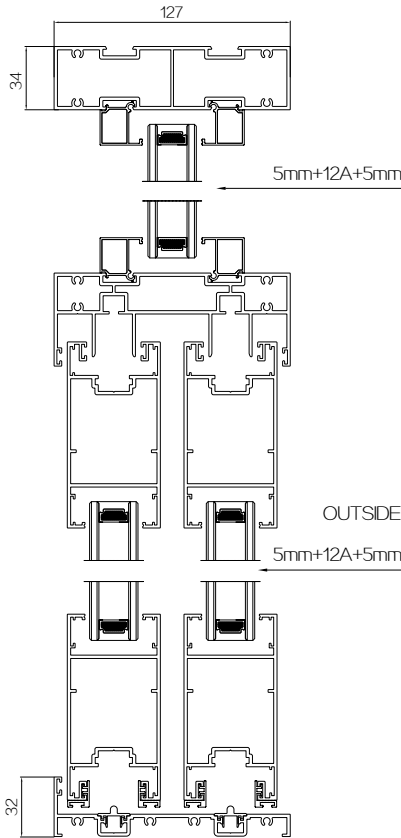

146 SERIES THERMAL BREAK ALUMINUM LIFTING SLIDING DOOR

Product specifications:

Profile thickness: 2.0mm

Fan width: 600mm–2000mm

Fan height: 1500mm–3000mm

Maximum load: 100kg

Standard glass: 5mm+27A+5mm double-layer tempered insulating glass

Blinds: Electric blinds or magnetic blinds

Insulation strip size: 20mm

Basic parameters:



Thermal insulation performance:
Uw1.7W/m2K



Wind pressure resistance performance:
5000Pa



Air-tightness coefficient:
level 3



Sound insulation performance:
Rw35dB




Watertight performance:
500Pa

Product description:

1. All sides of the door leaf and the frame body are sealed with rubber strips, and the connection between the outer frame and the upper and lower rails is sealed with waterproof plugs, waterproof gaskets and other seals, and the watertight performance is more than 500Pa.
2. The door leaf hook uses a plastic cover to divide the hook into two parts. The door frame uses a plastic plate insert to separate the door leaf from inside and outside to achieve separation between the inside and the outside. Control it below 1.7.
3. The frame and fan adopt the embedded structure, and the thickness of the profile is 2.0mm. In a single fan of 1.8 square meters, the wind pressure resistance value of the additional sleeve core can reach 5000PA.
4. It can be used for lifting sliding door, fixed door, ordinary sliding and other design, and also be used as a magnetic levitation electric sliding door.
5. The glass can be loaded and unloaded by laminating strips, which reduces difficulties in transportation and replacement of glass.



146 SERIES THERMAL BREAK ALUMINUM LIFTING SLIDING DOOR

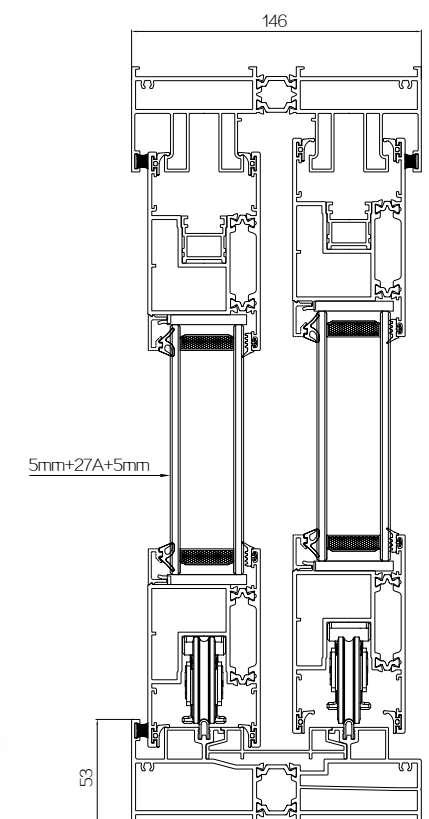



PRODUCT DETAILS



Thermal break heavy
Lifting




Thick and heavy

More stable






146 SERIES THERMAL BREAK ALUMINUM LIFTING SLIDING DOOR

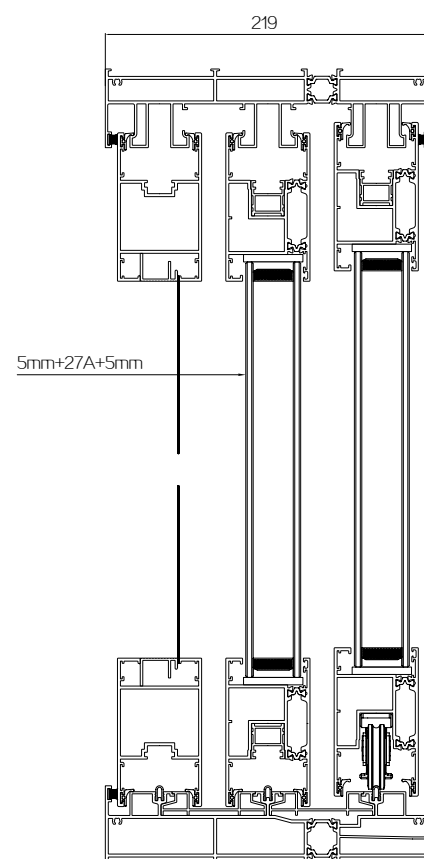

Three track Product details



Thermal break heavy Lifting

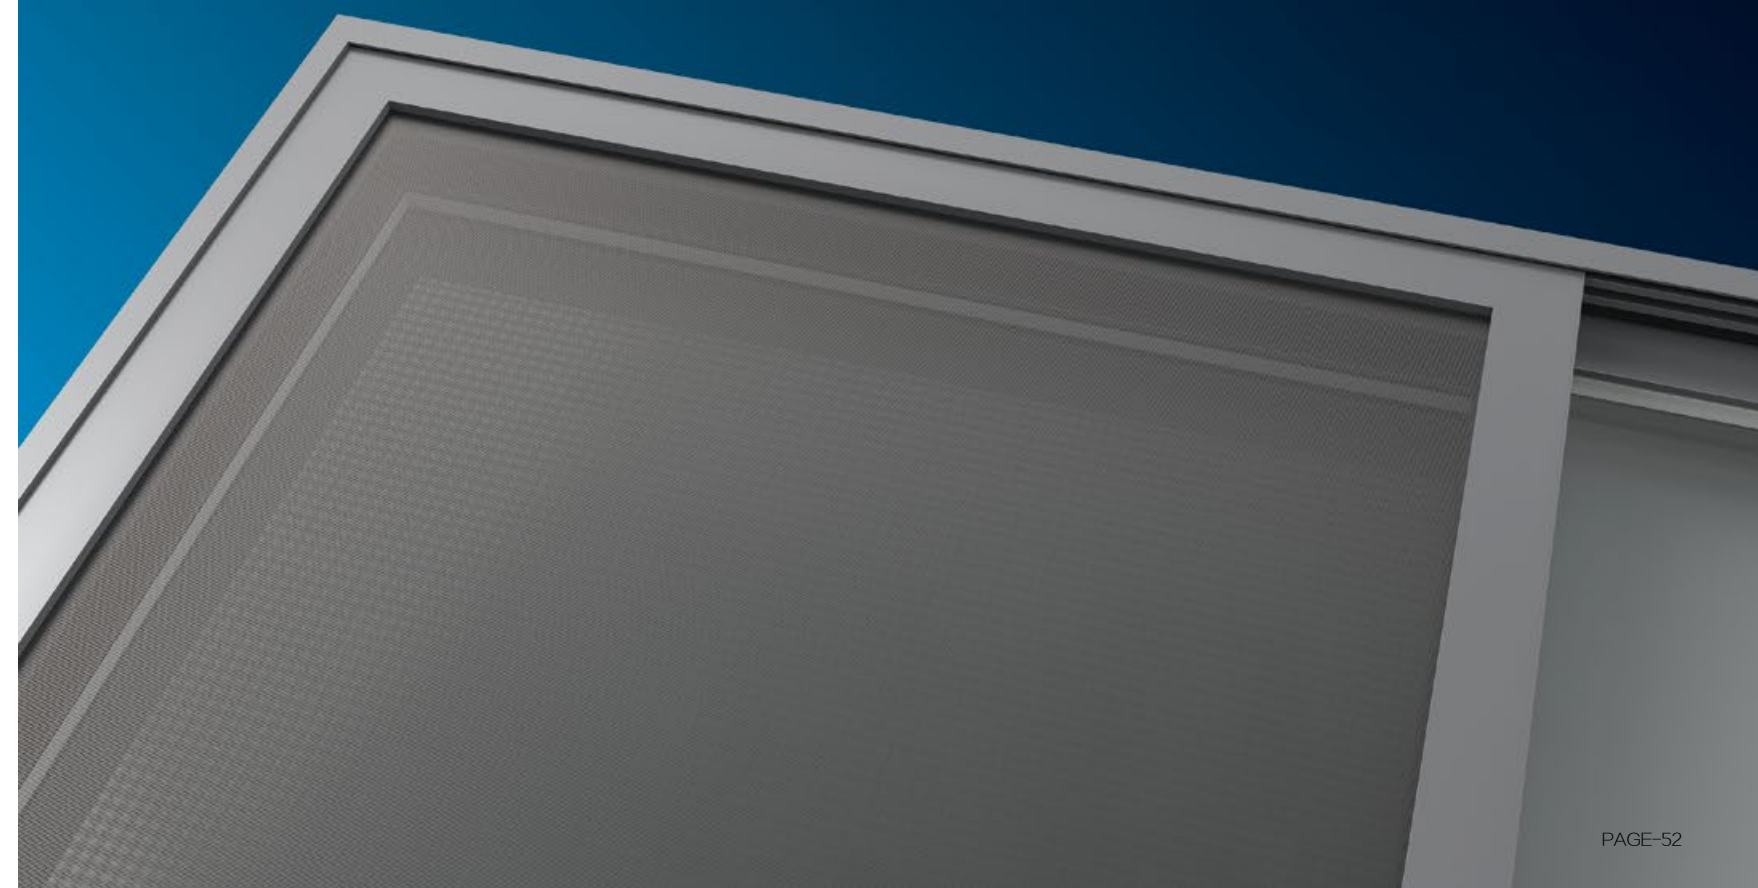



ALUMINUM

HEAVY LIFTING SLIDING DOOR

1. The lifting sliding door system adopts the principle of lever, by gently turning the handle to control the lifting of the door leaf.
2. When the handle is rotated downward, the door leaf is opened and fixed by the driver connected to it,
3. Make the pulley fall on the track of the lower frame, and drive the door leaf up, at this time the door leaf is open (freely sliding and sliding)
4. When the handle rotates upwards, the pulley is separated from the sliding track, and the door leaf is lowered.
5. The door leaf presses the rubber strip on the door frame under the action of gravity, and the door leaf is closed at this time.

170 SERIES

ALUMINUM LIFTING SLIDING DOOR

Product specifications:

Profile thickness : frame 2.2mm , fan 2.2mm , high track / low track 2.2mm

Fan width : 600mm~2000mm Fan height : 1500mm~2600mm

Standard glass : 5mm+12A+5mm+12A+5mm , triple-layer tempered insulating glass

Profile width : frame width 170mm , thermal insulation strip 40mm fan width 80mm , thermal insulation strip 33mm

Visible surface : upper track 56mm , thermal insulation strip 44mm , bottom track 50mm , thermal insulation strip 30mm

Basic parameters:



Thermal insulation performance:
level 8 ($1.6 \geq K \geq 1.3$)



Wind pressure resistance performance:
level 3 ($2.0 < P3 < 2.5$)



Air-tightness coefficient:
level 5 ($2.0 \geq q1 \geq 1.5$)



Sound insulation performance:
level 3 ($30 \leq Rw+Ctr < 35$)



Watertight performance:
level 4 ($350 \leq Pa < 500$)

Product description:

1. Double track lifting sliding construction, strong and durable, can meet the needs of large size heavy lifting sliding door
2. The installation of a unique U-shaped groove makes hygiene cleaning more convenient and the overall more beautiful, and the design of its elastic mouth makes the sealing performance better.
3. Using the principle of equal pressure and a unique drainage structure, the sliding door is designed with reasonable drainage channels, completely avoiding the possible rainwater flow into the room and the phenomenon of water in the track.
4. Flexible opening mode, larger single door design, better interior landscape, all-round improvement of building and life quality;
5. The profile section is larger, using different thickness of insulating glass and multi-cavity heat-insulating aluminium profiles, with high tensile and bending strength, stable performance, not easy to ageing, long service life;

HARDWARE CONFIGURATION



—— 150kg pulley ——



—— 300kg pulley ——



—— lock seat ——



—— lifting pulley ——



—— Handle without cylinder hole ——



—— clasp hands ——





—— Handle without cylinder hole ——



—— Lifting handle ——

170 SERIES ALUMINUM LIFTING SLIDING DOOR

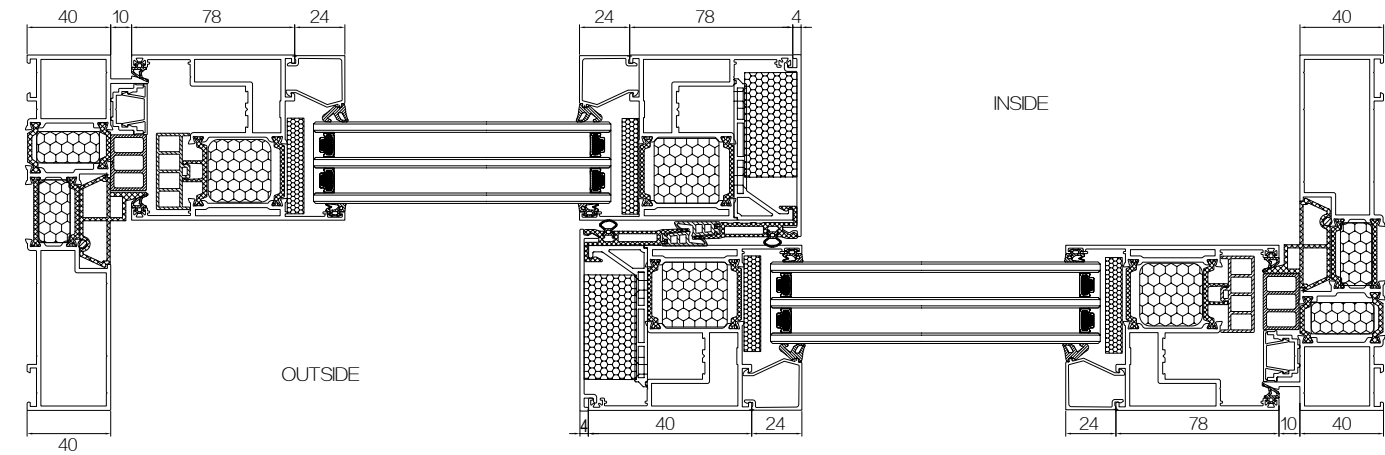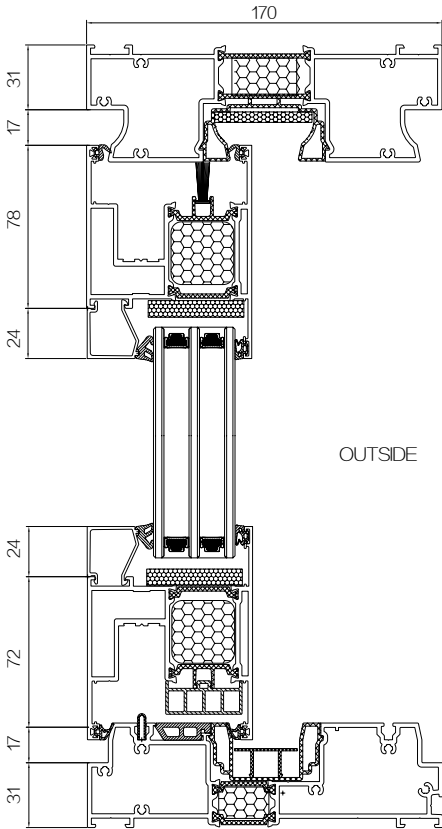

Product details



190 HEAVY LIFTING SYSTEM SLIDING DOOR SERIES TECHNICAL PARAMETER

190 SERIES HEAVY LIFTING SYSTEM SLIDING DOOR SERIES TECHNICAL PARAMETER

Profile thickness: 6060-T66 aluminum/wall thickness 3.0mm

Heat insulation strip: PA6-GF25-GB/T23615 high quality insulation strip

Visible surface: side frame 45mm/light positive surface 68mm/narrom side width:32mm

Size specification: sash width:600-2000mm sash high:1500mm-2600mm

Glass specification: 5mm+27A+5mm double layer tempered middle space glass

Opening method: Normal sliding,electric smart sliding,lifting system sliding

Basic parameters:



Heat insulation performance:
Level 8($1.6 \geq K \geq 1.3$)



Wind pressure resistance performance:
Level 3($2.0 < P3 < 2.5$)



Air-tightness coefficient:
Level 5($2.0 \geq q1 \geq 1.5$)





Sound insulation performance:
Level 3($30 \leq Rw+Ctr < 35$)



Watertight performance:
Level 4 ($350 \leq Pa < 500$)

Product description:

- 1.Thermal break structure design,accomplish high insulation performance.
- 2.Double lifting system,with specialize sealing rubber and low friction rubber cooperate,accomplish high airtight watertight and insulation performance.
- 3.High eight support bottom roller,and single panel double row roller specification structure design,accomplish larger door panel production,satisfy the requirments of users of larger viewing fans.
- 4.Largest single panel can make 9 square meters,two bottom rail drainage water plan,specical drainage water design,outside install water pipe design,satisfy different scenes and drainage requirement,make the products exellent watertight performance.
- 5.Narrow side hook and enhanced narrow side hook design,accomplish large side full view sliding door effect,view without boundaries.

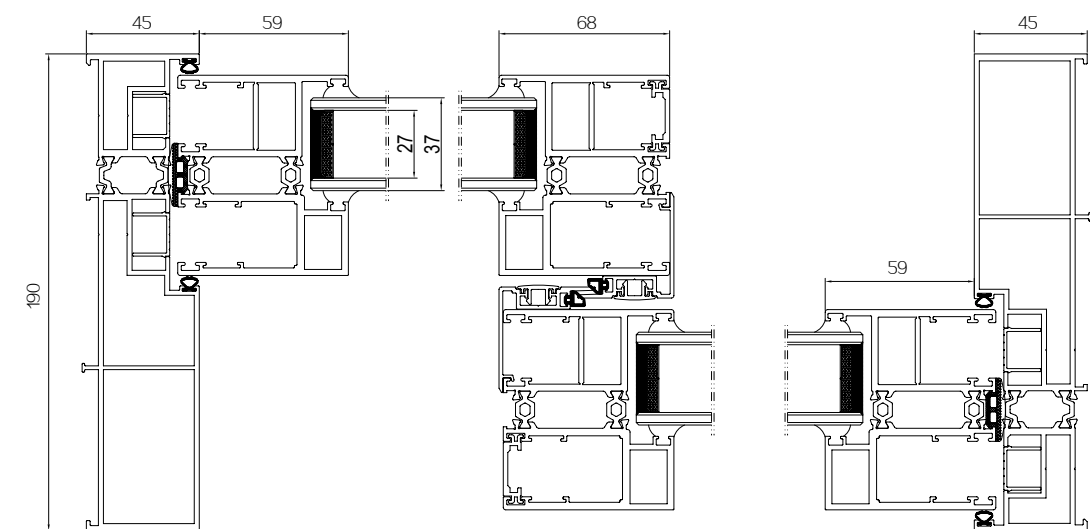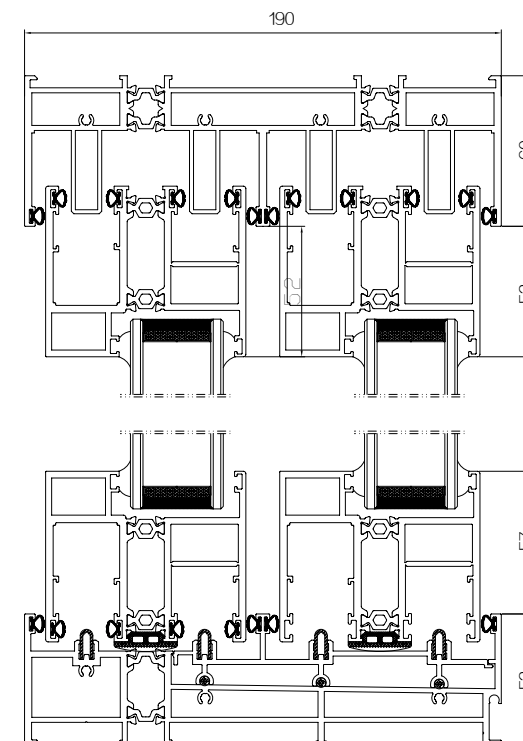



73-65 **SERIES**
THERMAL BREAK ALUMINUM HEAVY DUTY FOLDING DOOR

Product specifications:

The outer frame occupies the wall thickness 73mm, the thickness of glass panel is 65mm

Profile thickness: Frame: 1.6mm; Panel: 2.0mm

Width Singular panel: 500mm-900mm **Width of even panel:** 500mm-950mm

Height of panel: 1000mm-3200mm; Maximum bearing

Standard glass:

5mm+24A+5mm, double tempered insulating glass

Basic parameters:



Heat insulation performance
Grade 7 ($2.0 \geq K \geq 1.6$)



Wind pressure resistance performance:
Grade 3 (2.0≤P≤2.5)



Air-tightness coefficient:
Level 4 ($2.5 \geq q_1 \geq 2.0$)



Sound insulation performance:
Level 3 ($30 \leq R_{w+Ctr} < 35$)





Watertight performance:
Level 3 ($250 \leq Pa$ < 350)

Product description:

1. The middle column between the door fan and the door fan is connected, and the hinge is cleverly hidden. At the same time, the hinge design can adjust the gap between the fan and the fan, and the site installation is more convenient.
2. Anti-clamping design is adopted between the door fan and the middle column, which gives customers a good hand feeling and ensures the safety of use.
3. The door fan is designed to cover the edge of the water, so that the door fan is closely pressed together with the surrounding frame in the closed state, effectively enhancing the water tightness and wind pressure resistance.
4. It can be equipped with barrier-free low rail, high rail, flat rail and other lower rails to meet different customer application requirements.
5. The glass notch of the door door adopts large hollow design, which makes the large hollow glass more sound insulation.
6. Single rail design is adopted, the door can be 3.2 meters high, double rail bearing is more safe and durable.
7. Folding door can be fully opened, good ventilation effect, wider vision. Can do any combination folding number folding door, can do free folding door combination.

73-65 SERIES THERMAL BREAK ALUMINUM HEAVY DUTY FOLDING DOOR

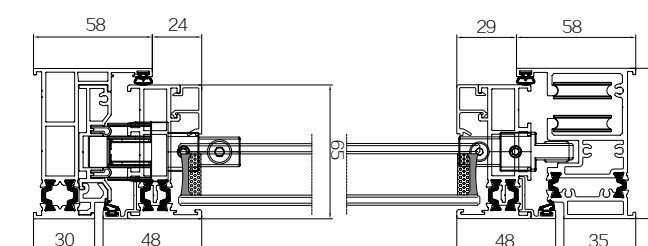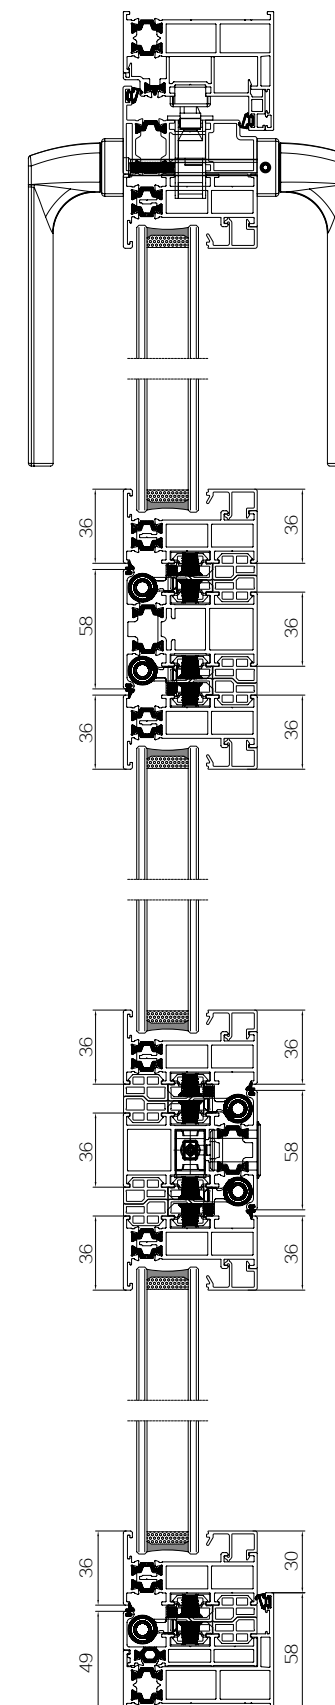



PRODUCT DETAILS



75 SERIES ALUMINUM FOLDING DOOR

Profile thickness:

frame thickness: 1.8mm Fan thickness: 1.8mm

Specification:

Fan width: 650mm–900mm Fan height: 1500mm–3000mm Maximum fan load: 100kg

Glass:

5mm+27A+5mm double tempered(single glass notch is 13mm)

Grills:

75 folding door series are normally square grills or diamond grills (27A hollow)

Blinds:

magnetic control Blinds and electric Blinds

Basic parameters:



Thermal insulation performance:
Uw3.5W/m2K



Wind pressure resistance performance:
+2000Pa



Air-tightness coefficient:
level 4



Sound insulation performance:
Rw up to 25dB



Watertight performance:
+400Pa



Standard 304 stainless steel track

Product description:

1. 6063–T5 profile has high strength, sound insulation and excellent safety performance.
- 2.Excellent anti–corrosion performance, not easy to stick to dust and scale, super long weather resistance, shelf life $\geq$ 20 years.
- 3.Using high–quality stainless steel guide rails, higher strength, longer life, and less movement resistance.
- 4.The door leaf breaks through the traditional limitation that it can only be opened by half. It can be fully opened and moved to both sides to be folded in sequence to maximize the ventilation area.
- 5.High load–bearing single–row deep groove ball bearings are used inside the pulleys, which have low resistance, light and stable operation, wear resistance, and long product life.
- 6.The foldable design makes the open space reach the maximum limit, can fully see the external landscape, makes the indoor and outdoor unobstructed, and has a wide field of vision.
- 7.The profile adopts EPDM sealing tape, which is not easy to age, more durable, and achieves a more comprehensive sealing effect.




Product details

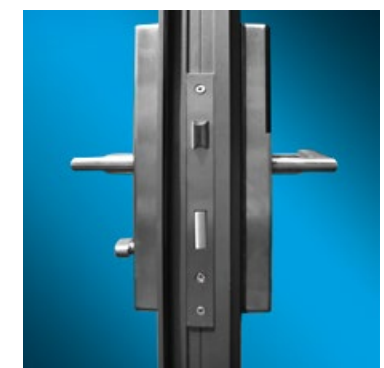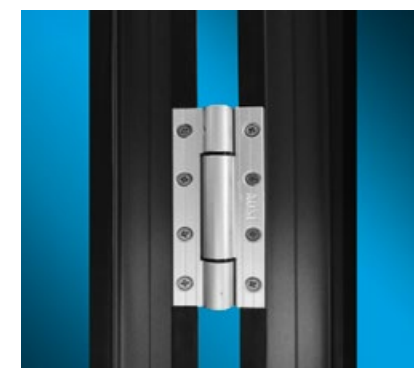



75 SERIES ALUMINUM FOLDING DOOR

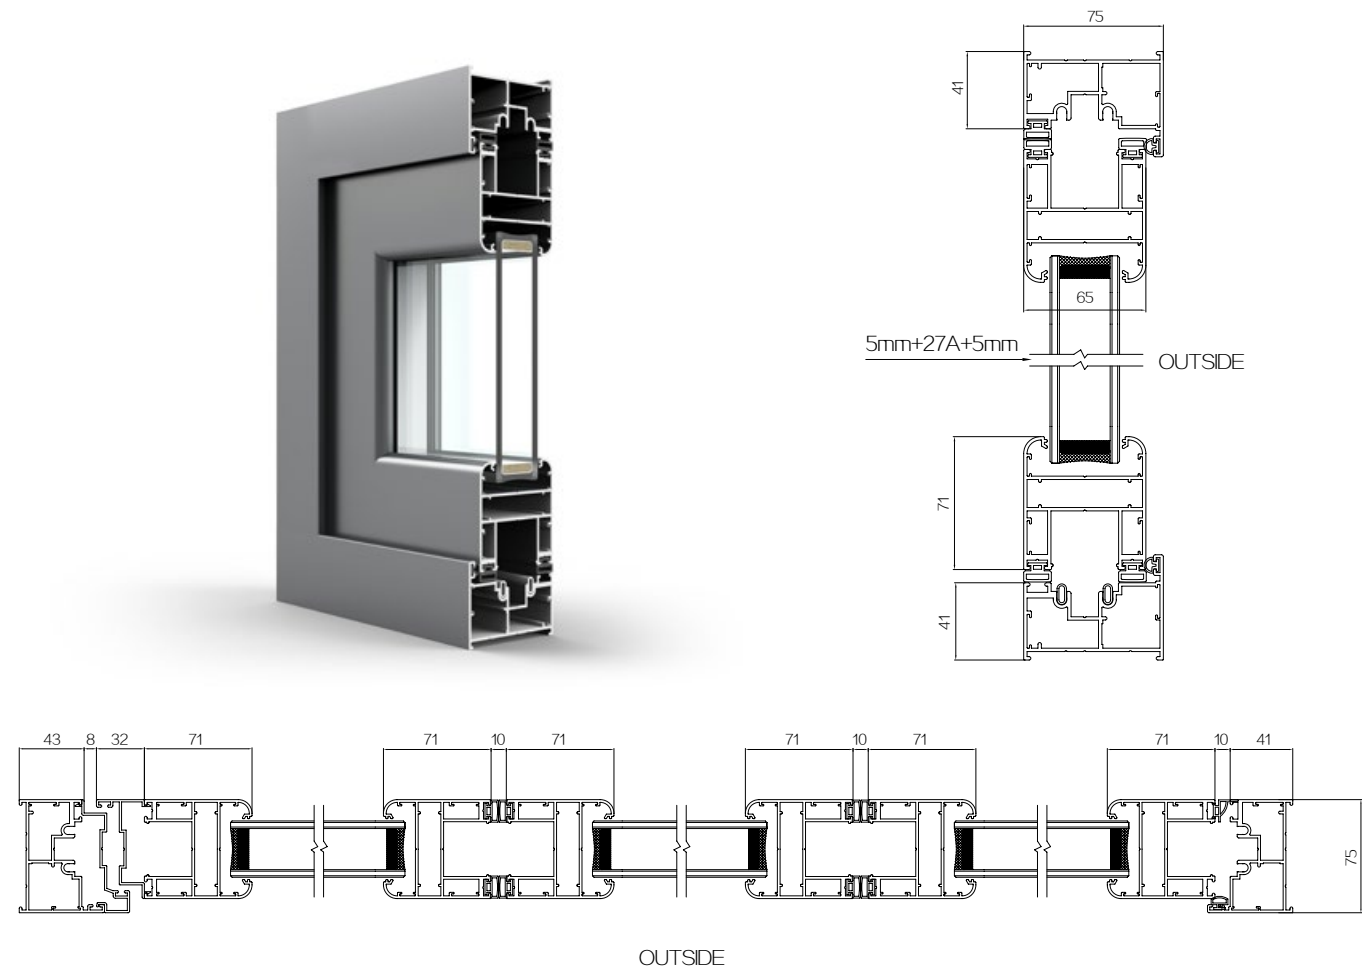

Folding door features



After the folding door is unfolded, it can be pushed to the end, occupying very little side space and saving a lot of space.

And the light will not be blocked, which can make the house brighter and have a wider view.

Technical Parameters:






Size range: fan width: 500mm–900mm fan height: 1900mm–3000mm

Glass specification: 5+27A+5mm double tempered insulating glass

Profile thickness:

Visible surface: frame 43mm / opening fan 60mm



Basic parameters:



Product description:

-
- Technical drawing of a window frame cross-section. The drawing includes a 3D perspective view of the frame and a detailed cross-section with dimensions. The dimensions are as follows:
- Top dimensions: 88, 62, 37, 18, 43, 13, 60, 18, 43, 17, 48, 60, 25, 35.
 - Bottom dimensions: 35, 9, 43, 18, 18, 43, 13, 43, 18, 18, 43, 13, 43, 18, 18, 37, 62, 43, 13, 15, 60, 60, 13, 60, 60, 13, 60, 60, 13, 43.
 - Left side dimension: 88.
 - Right side dimension: 88.
 - Label: OUTSIDE.

Product details

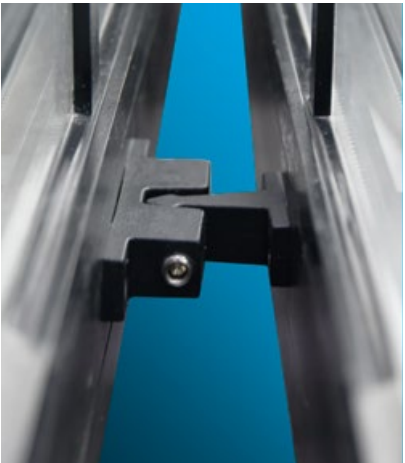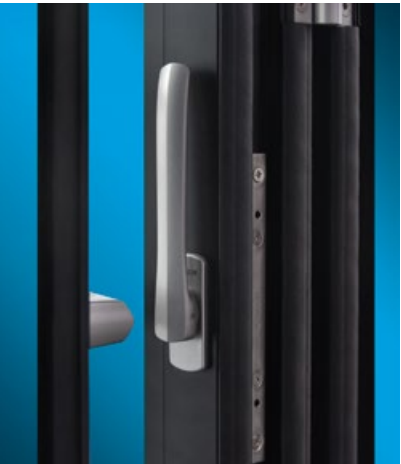

68

SERIES
THERMAL BREAK ALUMINUM FOLDING DOOR

Profile thickness:

Frame thickness: 2.0mm Fan thickness: 2.0mm

Fan width: 650mm–1000mm Fan height: 900mm–3500mm Maximum weight of single glass fan: 100kg

Glass: 5mm+27A+5mm double-layer tempered hollow glass Insulation strip size: 14.8mm.

Grills: diamond grills and square grills

Blinds: Electric Blinds and magnetic control Blinds

Basic parameters:



32°
Thermal insulation coefficient:
Uw2.0W/m2K



Wind pressure resistance performance:
+2500Pa



Air-tightness coefficient:
level 5



Sound insulation performance:
Rw up to 30dB



Watertight performance:
+500Pa


Product description:

1. The profile fan thickness is 68mm, and the visible surface of the door leaf is 140mm after closing.
- 2.The upper part adopts the bearing design of the positioning pulley block, and the lower part adopts the load-bearing pulley block, which has higher safety performance.
- 3.Perfect sealing structure design, a variety of door and window types are available, folding fans can be odd and even; more doors can be freely folded left and right, concise and bright.
- 4.Arc-shaped sealant is installed between the door leaf and the center column to prevent hands from being caught when pushing the door.
- 5.The lower wheel of super load-bearing bearing adopts high load-bearing single-row deep groove ball bearing inside the pulley, which has low resistance, light and stable operation, wear resistance and long product life.
- 6.The profile adopts EPDM sealing tape, which is not easy to age, more durable, and achieves a more comprehensive sealing effect.
- 7.Profiles and hardware doors and windows are common, door leaves can be combined at will 440/422/431/330/321, etc.



68

SERIES THERMAL BREAK ALUMINUM FOLDING DOOR

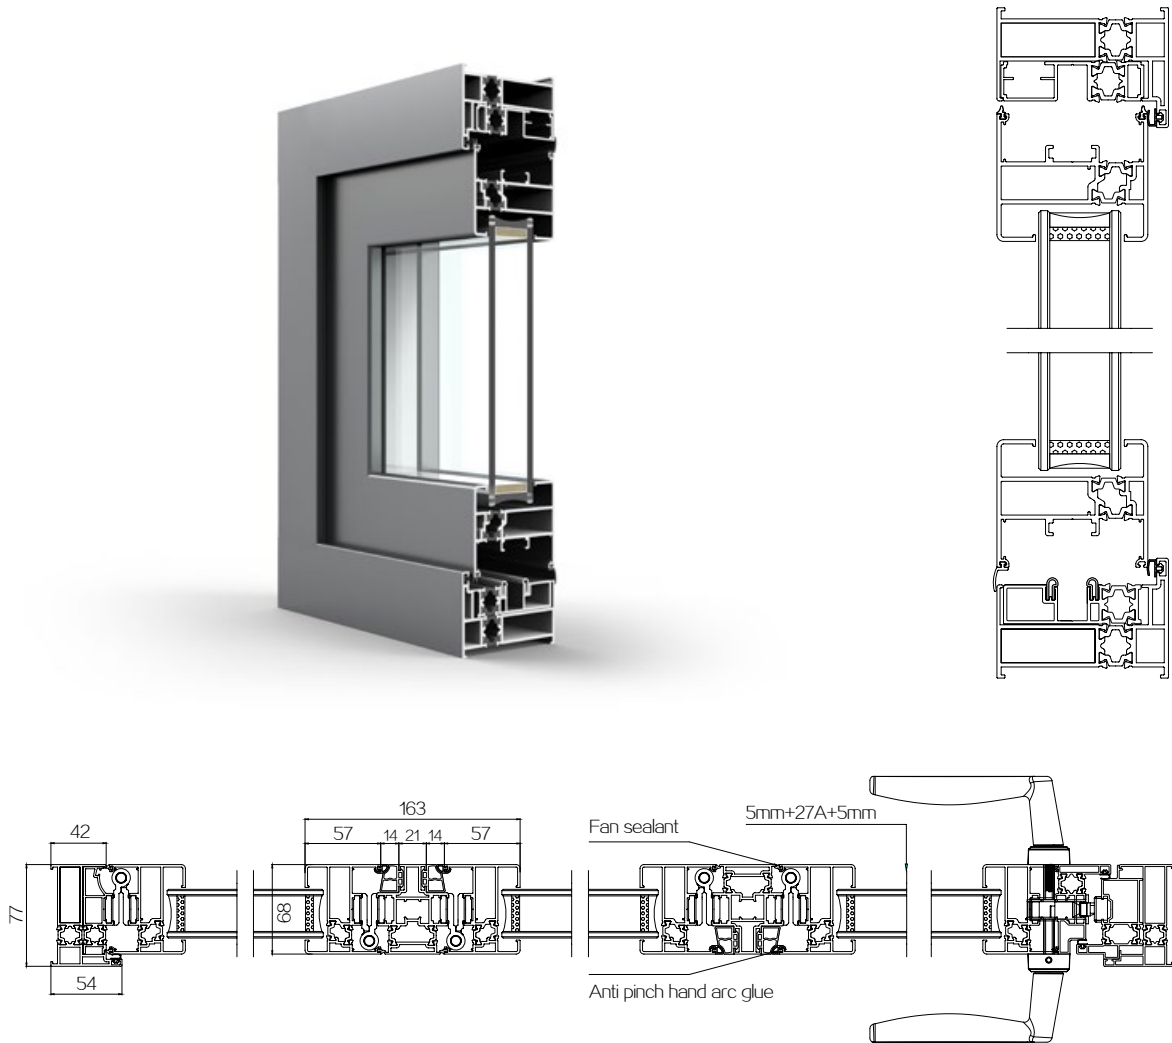


“ ALUMINIUM SWING HANDLE

PRODUCT DETAILS



Fully automatic locking function of door leaf,
Strict protection to reduce hidden dangers.

Folding door hinge details

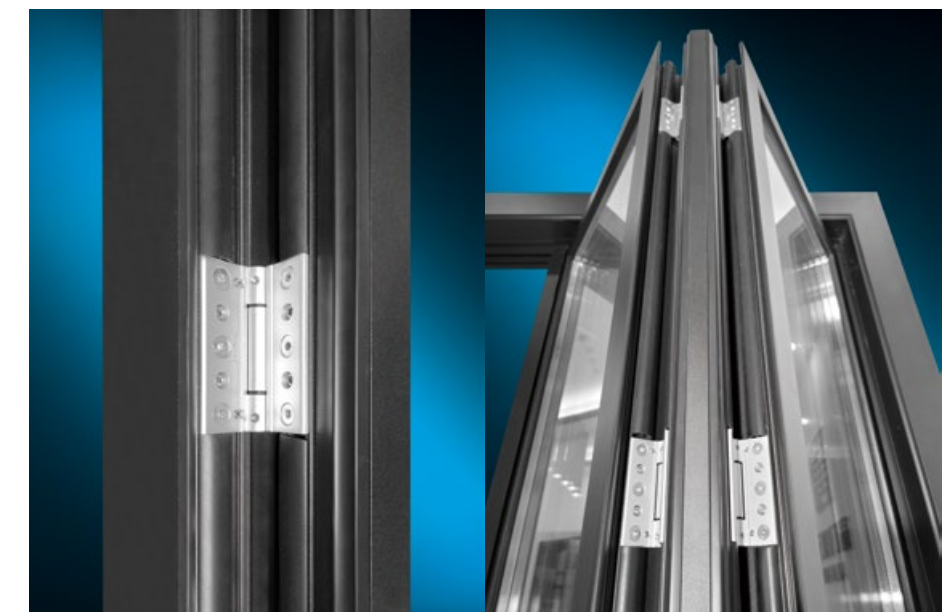

120

SERIES THERMAL BREAK ALUMINUM SLIDING WINDOW WITH NET

Product configuration:

120 thermal break aluminum series when making windows:

fan width: 500mm–1500mm fan height: 800mm–1500mm Maximum fan weight: 60kg

120 thermal break aluminum series when making doors:

fan width: 600mm–1200mm fan height: 1800mm–2400mm Maximum fan load: 80kg

Glass: 5mm+20A+5mm double tempered insulating glass

Grills: normal square grid strips (20A hollow)

Blinds: magnetic blinds

Basic parameters:



Thermal insulation coefficient:
Uw2.6W/m2K



Wind pressure resistance coefficient:
± 2500Pa



Water tightness coefficient:
+400Pa



Air tightness coefficient:
Level 4




Sound insulation coefficient:
Rw up to 30dB

Product description:

- 1.Material design adopts European standard notch to meet the versatility of accessories on the market.
- 2.Double-layer (5+20A+5) fully sealed hollow automotive-grade safety glass, double-layer sealing, better sealing; can effectively reduce the resonance effect of sound waves, and has good sound insulation and heat insulation effects.
- 3.High safety performance, single-sided one-word multi-point lock structure design, can be equipped with double-sided locks to achieve good anti-theft effect.
- 4.Hollow glass can be freely equipped with magnetically controlled hollow shutters to achieve two-way selection of lighting and sunshading.

120



SERIES THERMAL BREAK ALUMINUM SLIDING WINDOW WITH NET

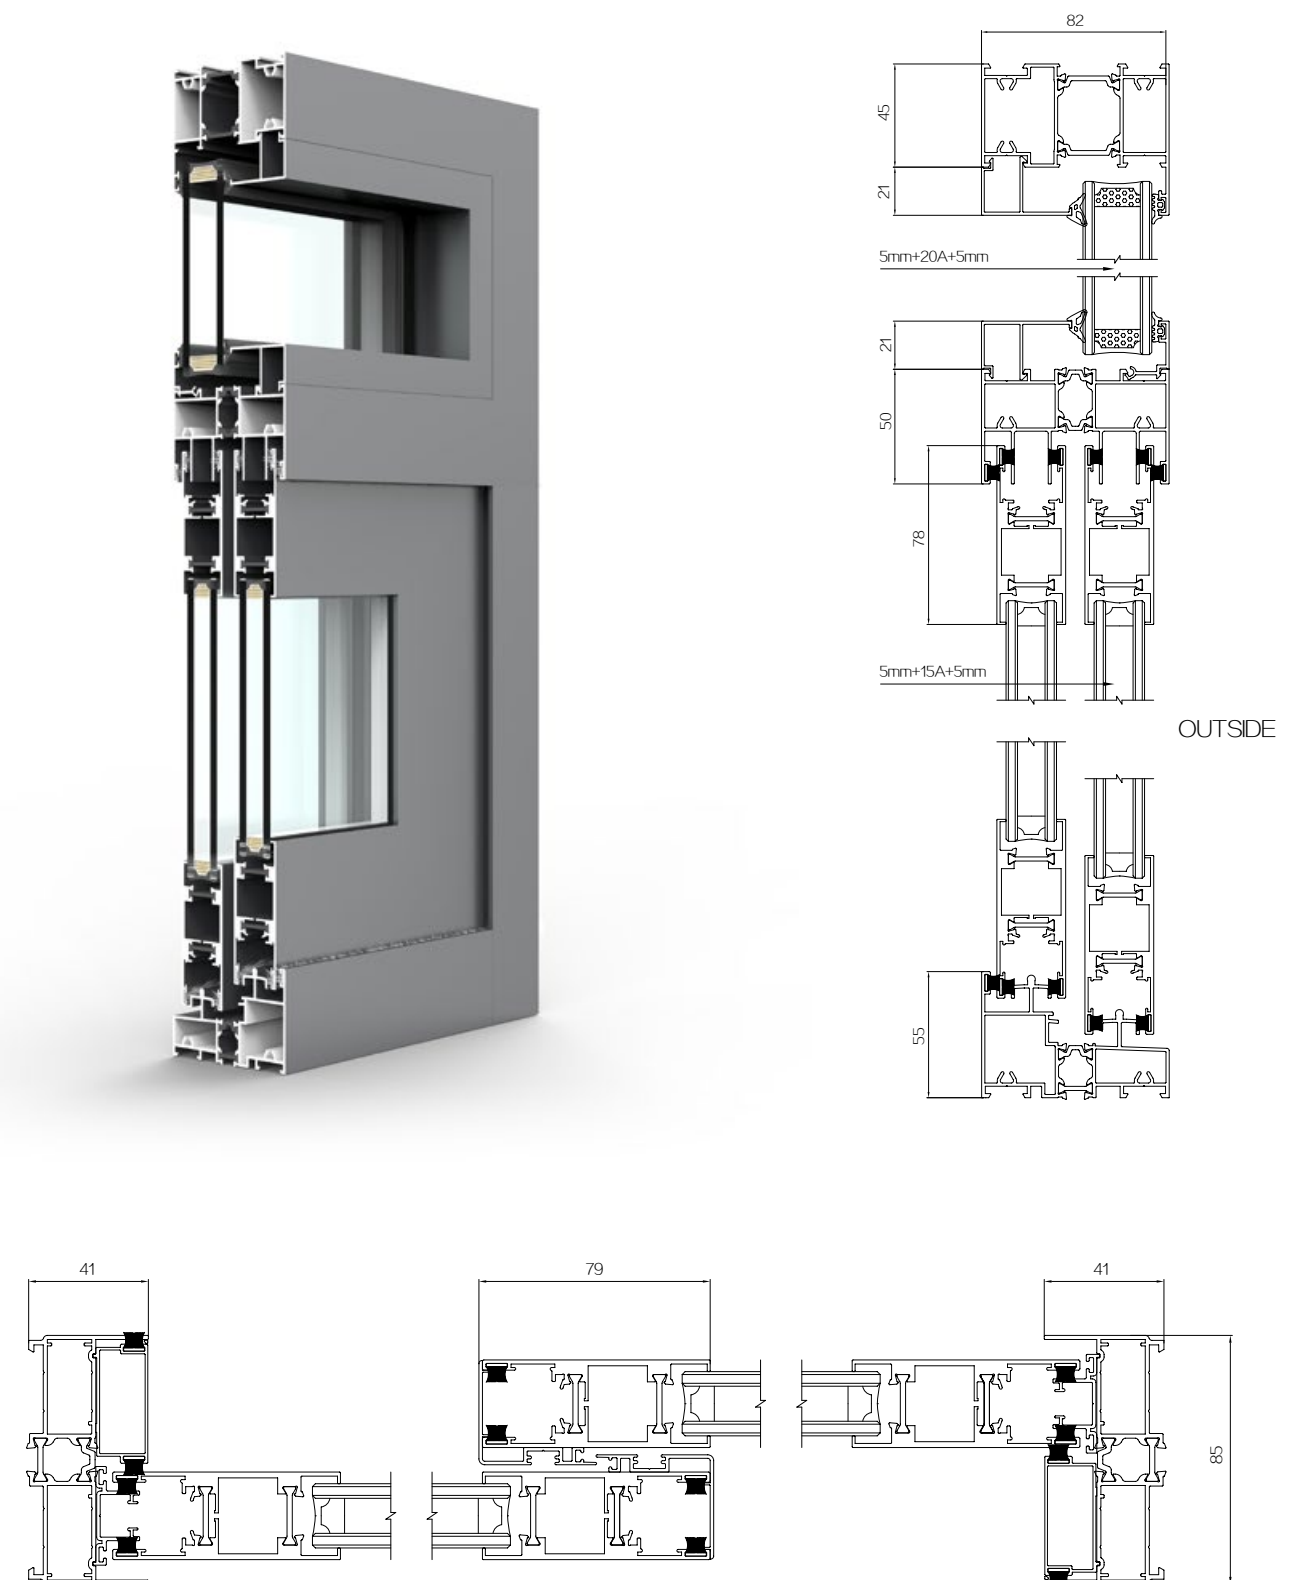

120

SERIES
THERMAL BREAK ALUMINUM
SLIDING WINDOW WITH NET

Optional lower rail:

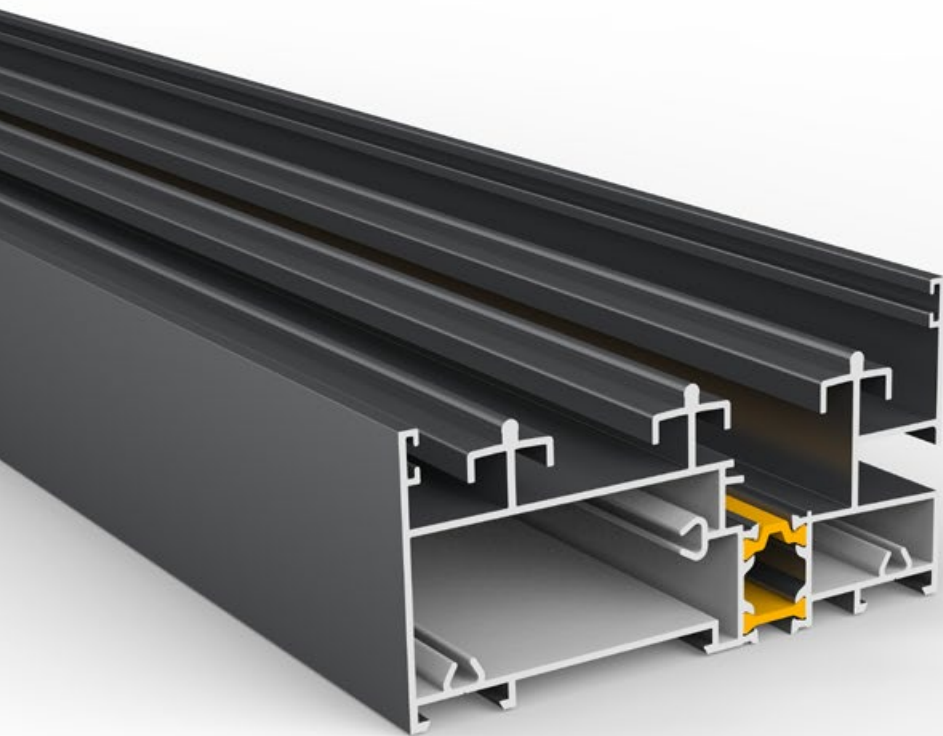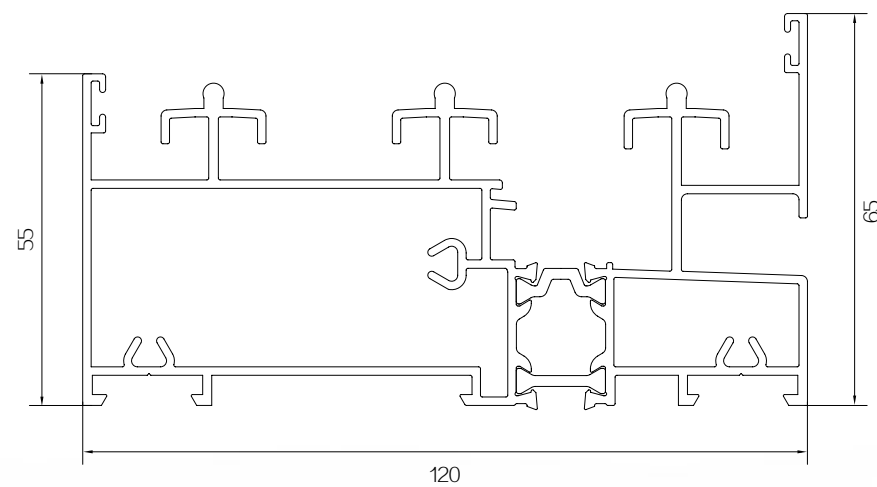

110

SERIES THERMAL BREAK
ALUMINUM CASEMENT WINDOW WITH NET

Product configuration:

Profile thickness:

Frame thickness: 1.8mm

Fan thickness: 2.0mm

Fan width: 450mm–800mm

Fan height: 600mm–2000mm

Maximum load: 80kg

Glass: 5+20A+5 double-layer tempered hollow glass

Blinds: standard magnetic control hollow blinds

Basic parameters:



Thermal insulation coefficient:
Uw2.5W/m2K



Wind pressure resistance coefficient:
+2500Pa



Water tightness coefficient:
+500Pa



Air tightness coefficient:
Level 5



Sound insulation coefficient:
Rw up to 30dB

Product description:

1. The frame width is 110mm, 14.8mm heat insulation strip is used, and nylon heat insulation strip (PA66GF25) is used, which has excellent heat insulation performance.
2. Double layer (5+20A+5) fully sealed hollow automobile-grade safety glass, which can be used as inner yarn and outer glass, double-layer sealing, better sealing;
3. It can effectively reduce the resonance effect of sound waves and has a good sound insulation effect.
4. Standard C-slot accessories on the general market,systematic design of rubber strips, seals, hardware and other accessories, realize the superior performance of door and window products, and ensure good air-tightness and water-tightness.
5. Insulating glass can be freely equipped with magnetically controlled hollow louvers to realize two-way selection of lighting and shading.
6. Diversified design of appearance and function, novel visual effect, filled with polymer thermal insulation material in the cavity, detailed design is fully upgraded, and product performance is improved.
- 7.The independent drainage system design of frame and fan can effectively improve the water tightness of the whole window and prevent rainwater from ingressing. The outer frame adopts a hidden drainage scheme, and the overall design is simple and elegant.

HARDWARE CONFIGURATION



Upper and lower hinge



Transmission box



Lock block + side drive rod




Friction stay



Lock body



Aluminum drive rod

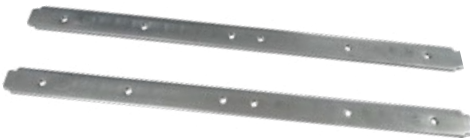

Aluminum connector



Frame panel



110 SERIES THERMAL BREAK ALUMINUM CASEMENT WINDOW WITH NET

SIMPLICITY LIFE


Find a home to store your busy heart, without the noise and irritability of the world,
Without the worldly complexity and helplessness, find your heart and make life easier and simpler.

KEEP IMPROVING MANUFACTURING PROCESS

Continuously innovative R&D technology, excellent manufacturing process,
The ingenious details touched people's yearning for a perfect life.



Product details

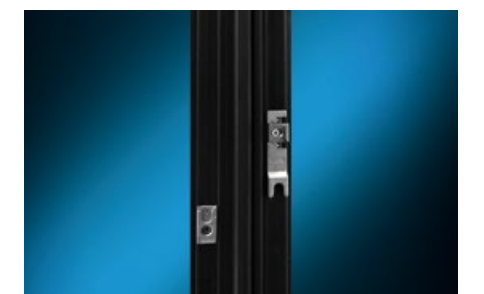

50

SERIES
ALUMINUM CASEMENT DOOR

Profile thickness:

sash thickness: 1.4mm door thickness: 1.8mm Frame thickness: 1.4mm

Tilt and turn window:

Fan width: 520mm–800mm Fan height: 700mm–1500mm Maximum fan load: 60kg

Casement window:

Fan width: 400mm–800mm Fan height: 700mm–1500mm Maximum fan load: 60kg

When the 50 series is used for casement doors:

Width: 600mm–900mm Height: 1800mm–2400mm

Glass: 5mm+6A+5mm double tempered glass

In the case of broken edges, it can make up to 5mm+19A+5mm double tempered insulating glass

Grills :

normal is falt grill (6A or 9A hollow)or square large grill (19A hollow)

Blinds: magnetic control Blinds

The corner angle can be 90° and 135°

Basic parameters:



Thermal insulation coefficient:
Uw4.0W/ m² K



Wind pressure resistance
2000Pa



Water tightness:
300Pa



Air tightness:
Class 3



Sound insulation performance:
25dB

Product description:

- 1.The wall thickness of the standard profile is 1.4mm, and the design adopts the European standard notch to meet the versatility of accessories on the marketEasy to use, flexible, more space-saving, large opening area, wide field of vision, and more conducive to air convection.
- 2.The door leaf is beautifully designed and suitable for high-end villas, residences and clubs.
- 3.The opening style can be done: outside opening window, inside opening window, Tilt and turn window, top hung window;;single casement door, double casement door.

HARDWARE CONFIGURATION



Wind bracing



Lock cylinder



Drive rod – lock seat – lock point – connector



Transmission box



Lock cylinder cover





Hinge




Handle



Handle

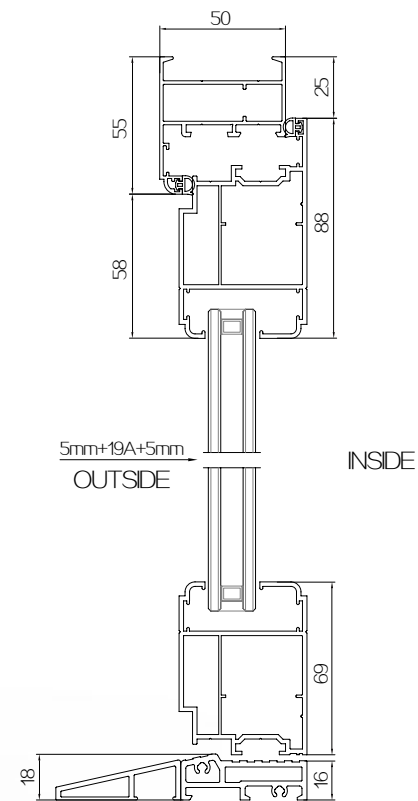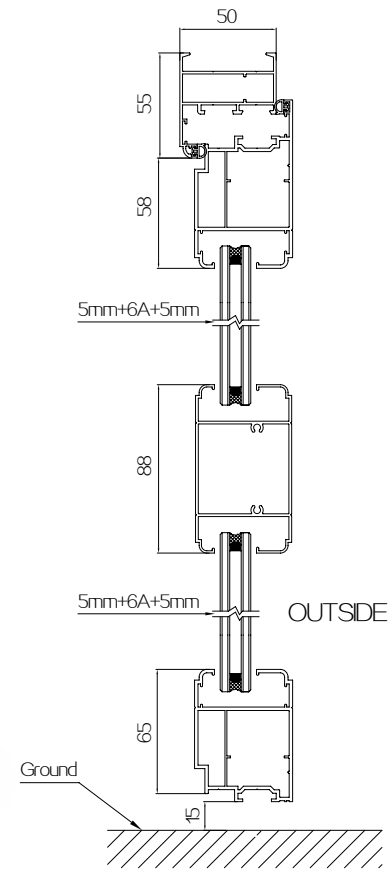

75 SERIES THERMAL BREAK SPRING DOOR

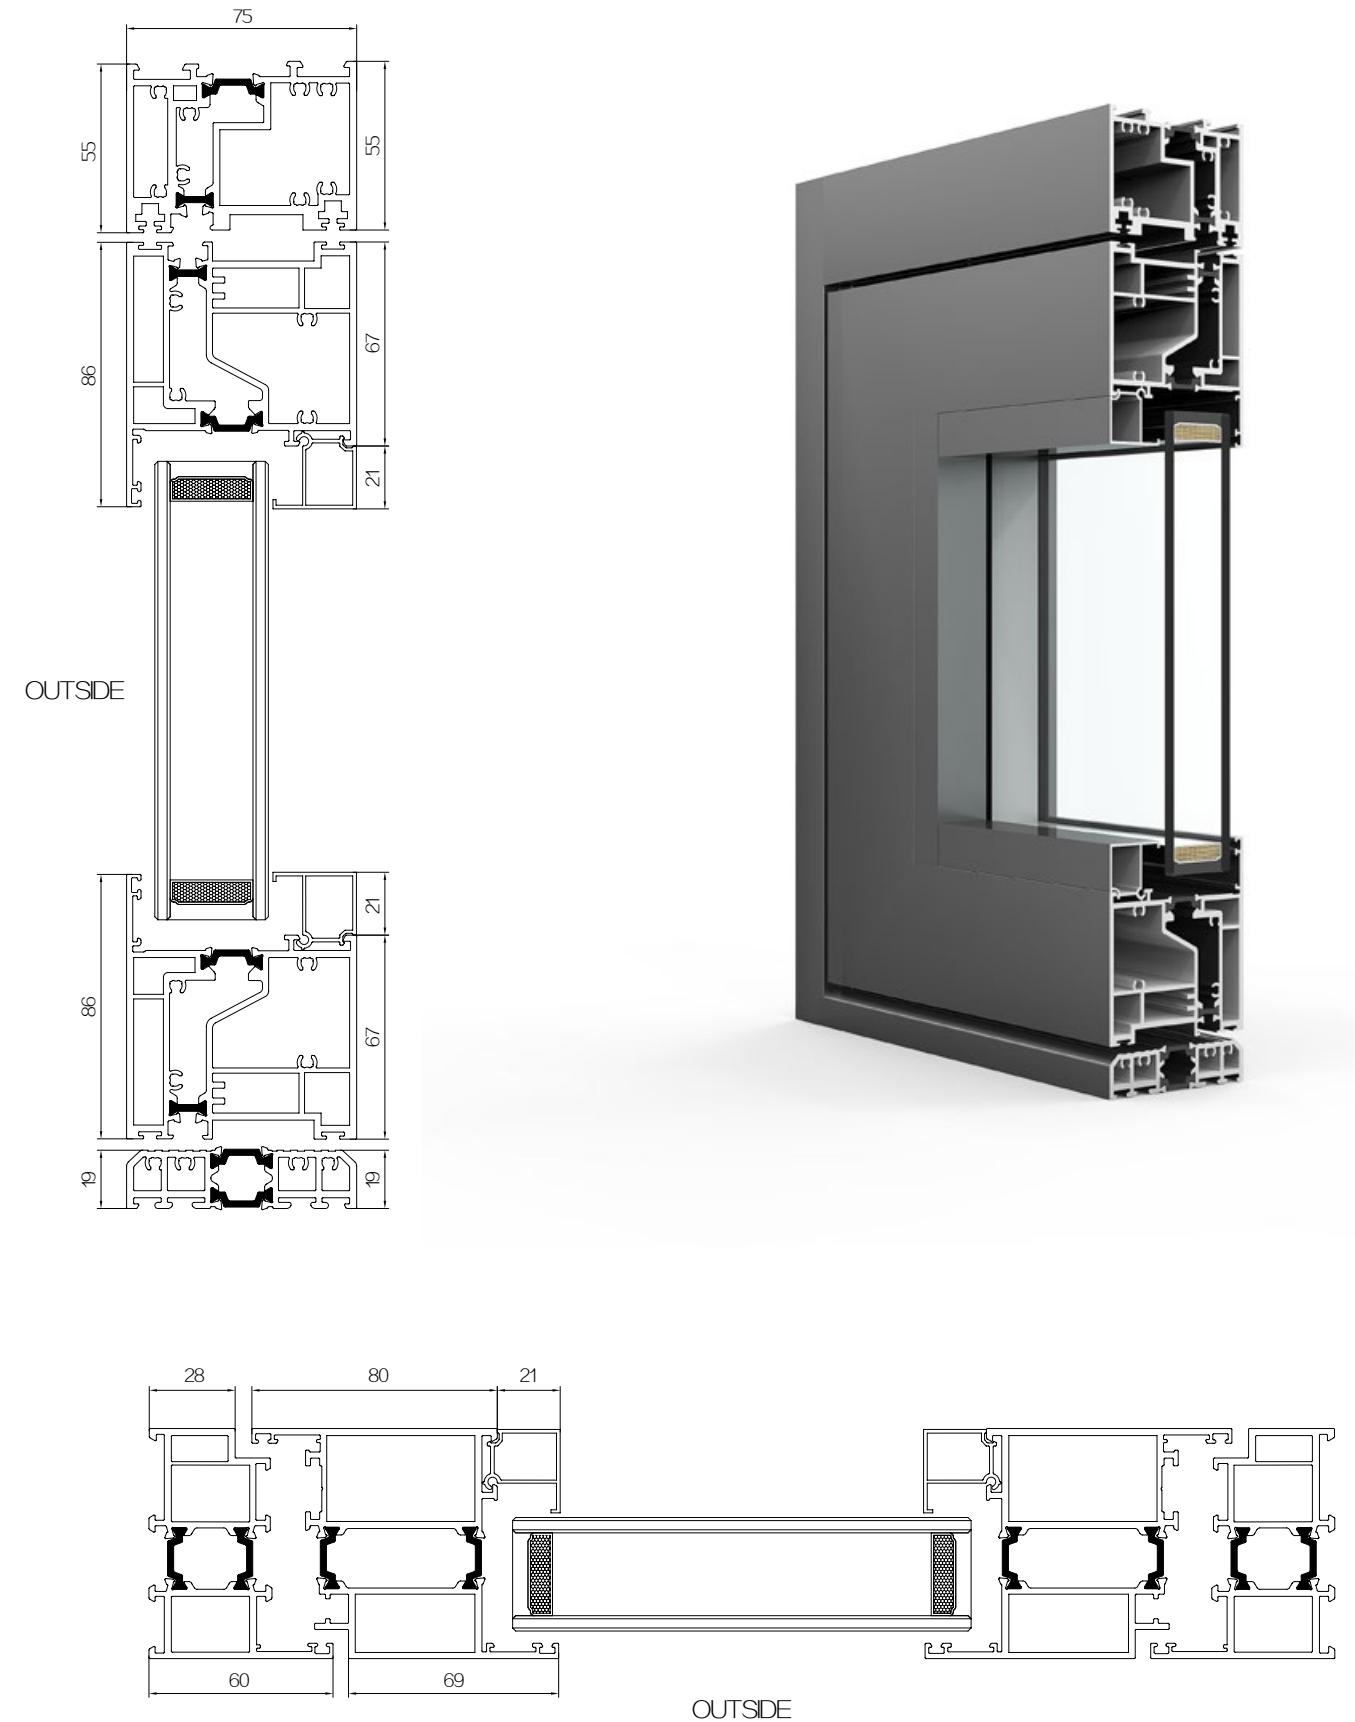

75 SERIES THERMAL BREAK SPRING DOOR

Technical Parameters:

Profile thickness:

6063-T5 grade aluminum alloy / thickness 2.3mm

Heat insulation strip: PA66-GF25-S20 high-quality heat insulation strip

Profile width: frame thickness 75mm, heat insulation strip 20mm; fan thickness 75mm, heat insulation strip 20mm;

Visible surface: frame 40mm / sash center column 26mm / opening sash 60mm, 80mm

Dimensions: panel width: 800mm-1000mm panel height: 2000mm-2600mm maximum fan weight: 130kg

Glass specification: 5mm+27A+5mm / 5mm+19A+5mm double-layer tempered insulating glass

Basic parameters:

	Thermal insulation coefficient: Uw2.5W/m2K		Wind pressure resistance coefficient: +2500Pa		Water tightness coefficient: +500Pa
	Air tightness coefficient: Level 5		Sound insulation coefficient: Rw up to 30dB		

Product description:

1. The noise of opening and closing is small, and the walls on both sides of the door opening can not be occupied. The service life is long, and the heat preservation and dustproof performance are relatively good. It is suitable for various high, medium and low-grade decorative doors.
2. The frame and material of the door leaf are designed as a rectangular cavity, which is more firmly connected and more stable in structure. Combined with the double-layer insulating glass design, it is not only compact in structure, but also has good sound insulation and impact resistance, and is very solid and durable.
3. The door leaf adopts a flush design on all sides, with 19A/27A rectangular pressure line, which is not easy to deform. There is a sealing strip built into the C groove, which has better sealing performance, can effectively reduce the sound wave resonance, and has a good sound insulation and heat insulation effect.
4. The insulating glass can be freely equipped with magnetically controlled hollow louvers and electric louvers to realize two-way selection of lighting and shading.

Product Features

The door leaf adopts a flush design on all sides, with 19A/27A rectangular pressure line, which is not easy to deform. There is a sealing strip built into the C groove, which has better sealing performance, can effectively reduce the sound wave resonance, and has a good sound insulation and heat insulation effect.

75 SERIES
THERMAL BREAK SPRING DOOR



18 SERIES
SLIM FRAME ALUMINUM CASEMENT DOOR



Processing dimensions of doors and windows:

Width : 817mm Height : 1925mm

Glass: 5mm frosted glass + 15A + 5mm Changhong glass


The glass frosting surface is on the indoor surface; Changhong glass is outside the room.

The concave convex surface of Changhong glass is made in the hollow layer.

Package: Double clad mode, wall thickness 190mm.

Remarks: Lifting leg 10mm; The standard configuration lock adopts square lock (magnetic suction mode)


18 SERIES SLIM FRAME ALUMINUM CASEMENT DOOR

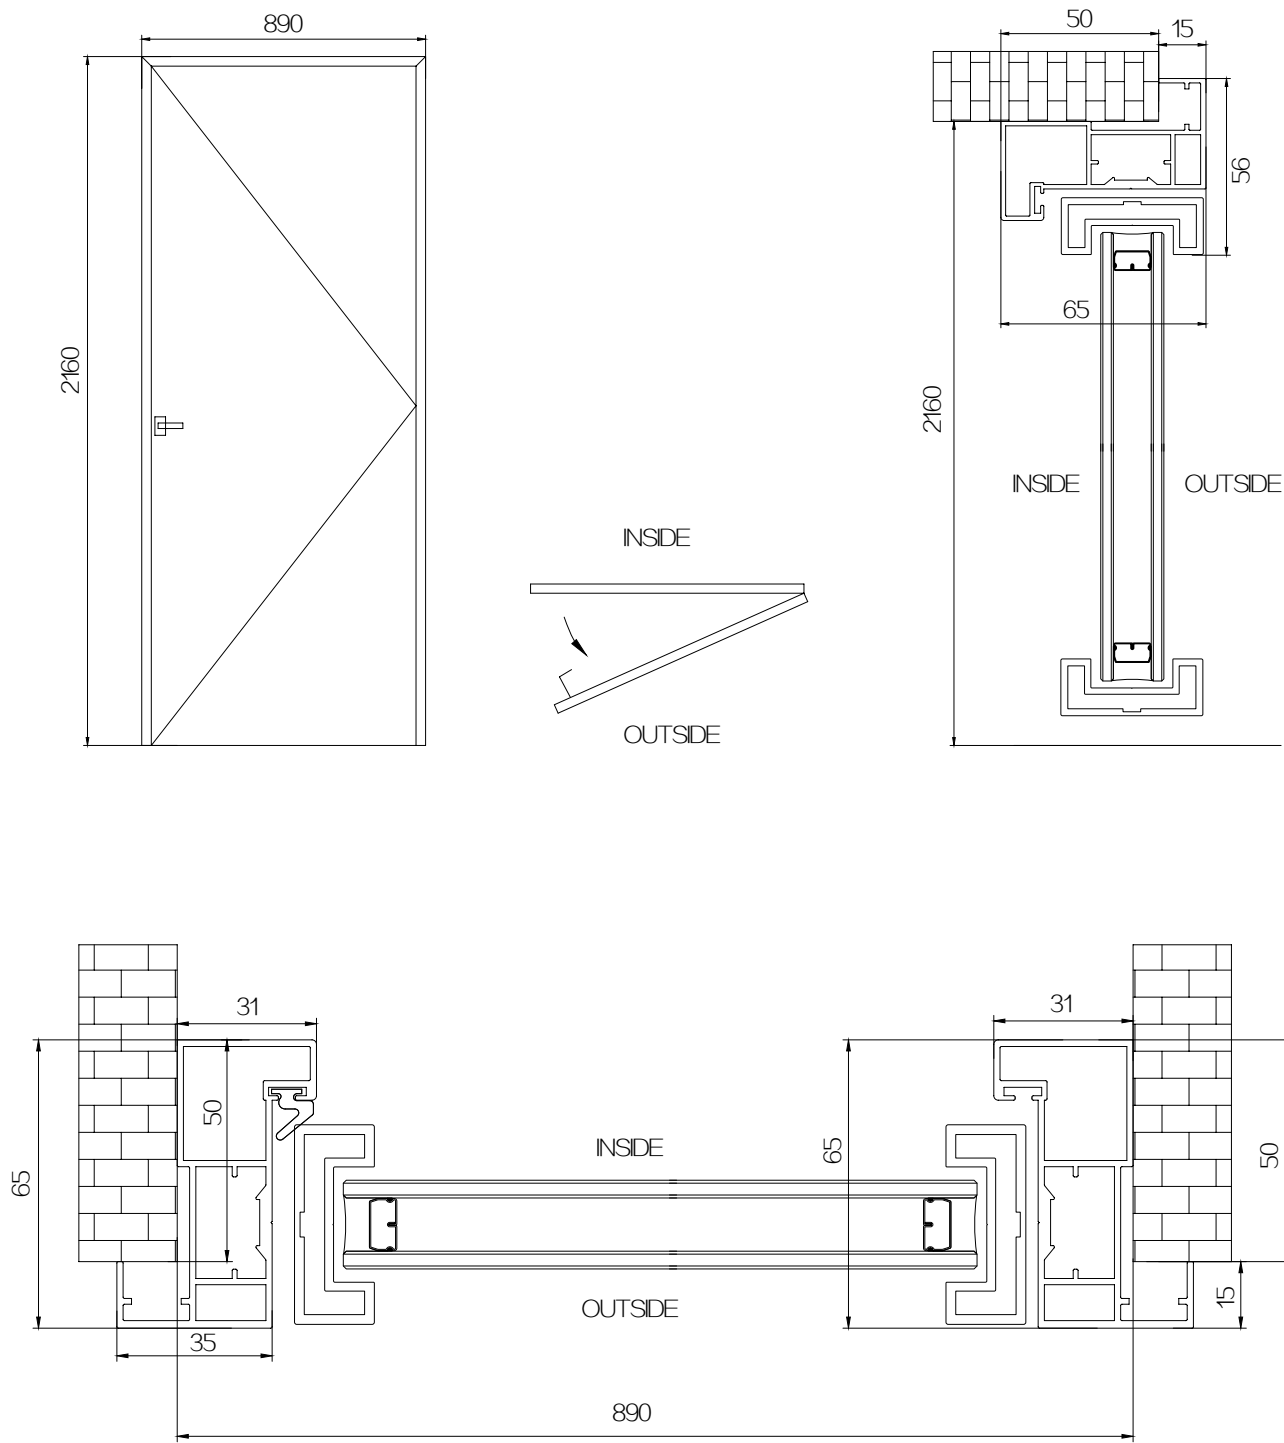



18 SERIES
SLIM FRAME ALUMINUM CASEMENT DOOR



Double jacket

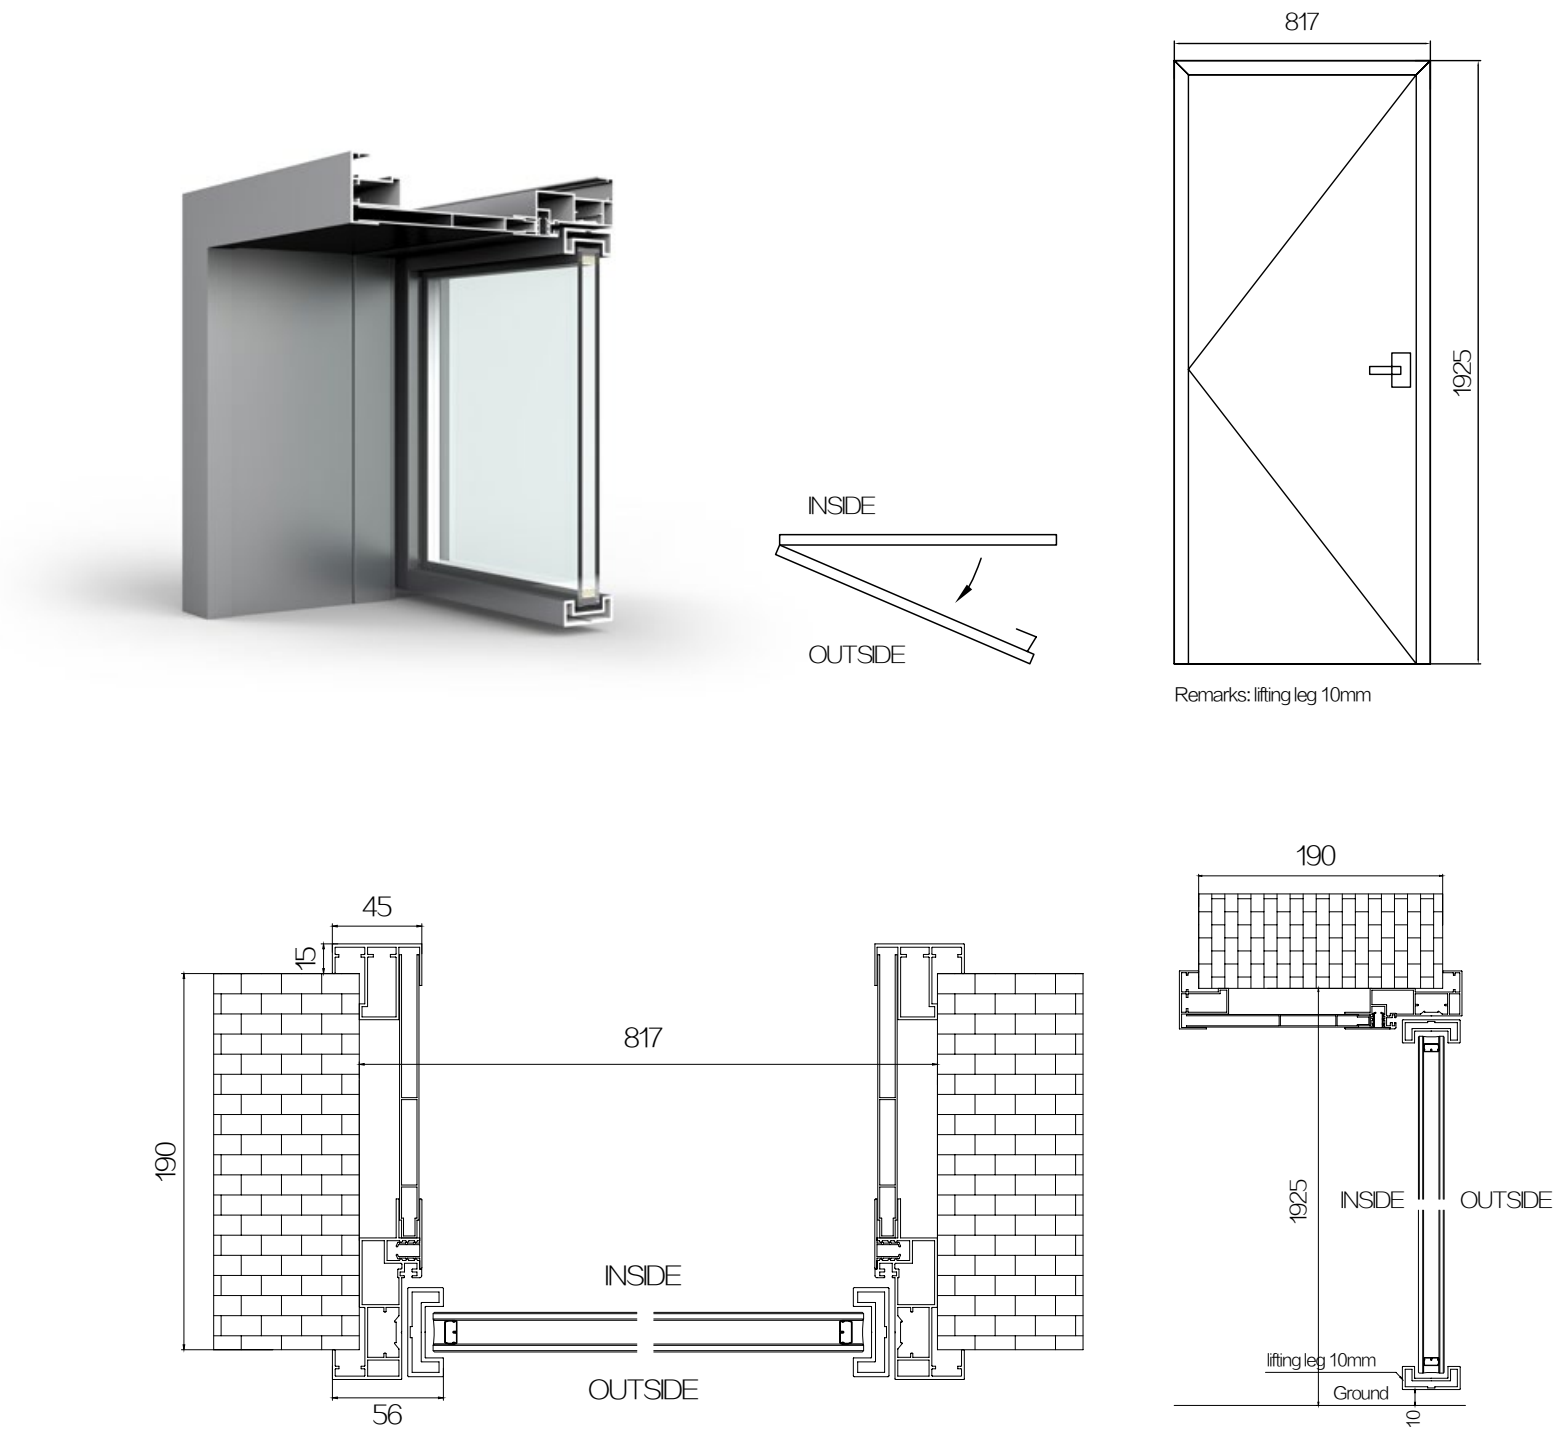

100 * 65 INVISIBLE ALUMINUM CURTAIN WALL




Main features of frame type (element type) curtain wall

- 1. The construction method is flexible and the process is relatively mature. After many engineering practice tests, it is the most adopted curtain wall structure at present.
- 2. The main structure has strong adaptability, and the installation sequence is basically not affected by the main structure.
- 3. The joint is treated with sealant, with good water tightness and air tightness, good thermal insulation, sound insulation and noise reduction capacity, and certain resistance to interlayer displacement.
- 4. Panel materials and unit components are manufactured in the factory, and the service performance of structural adhesive is guaranteed.

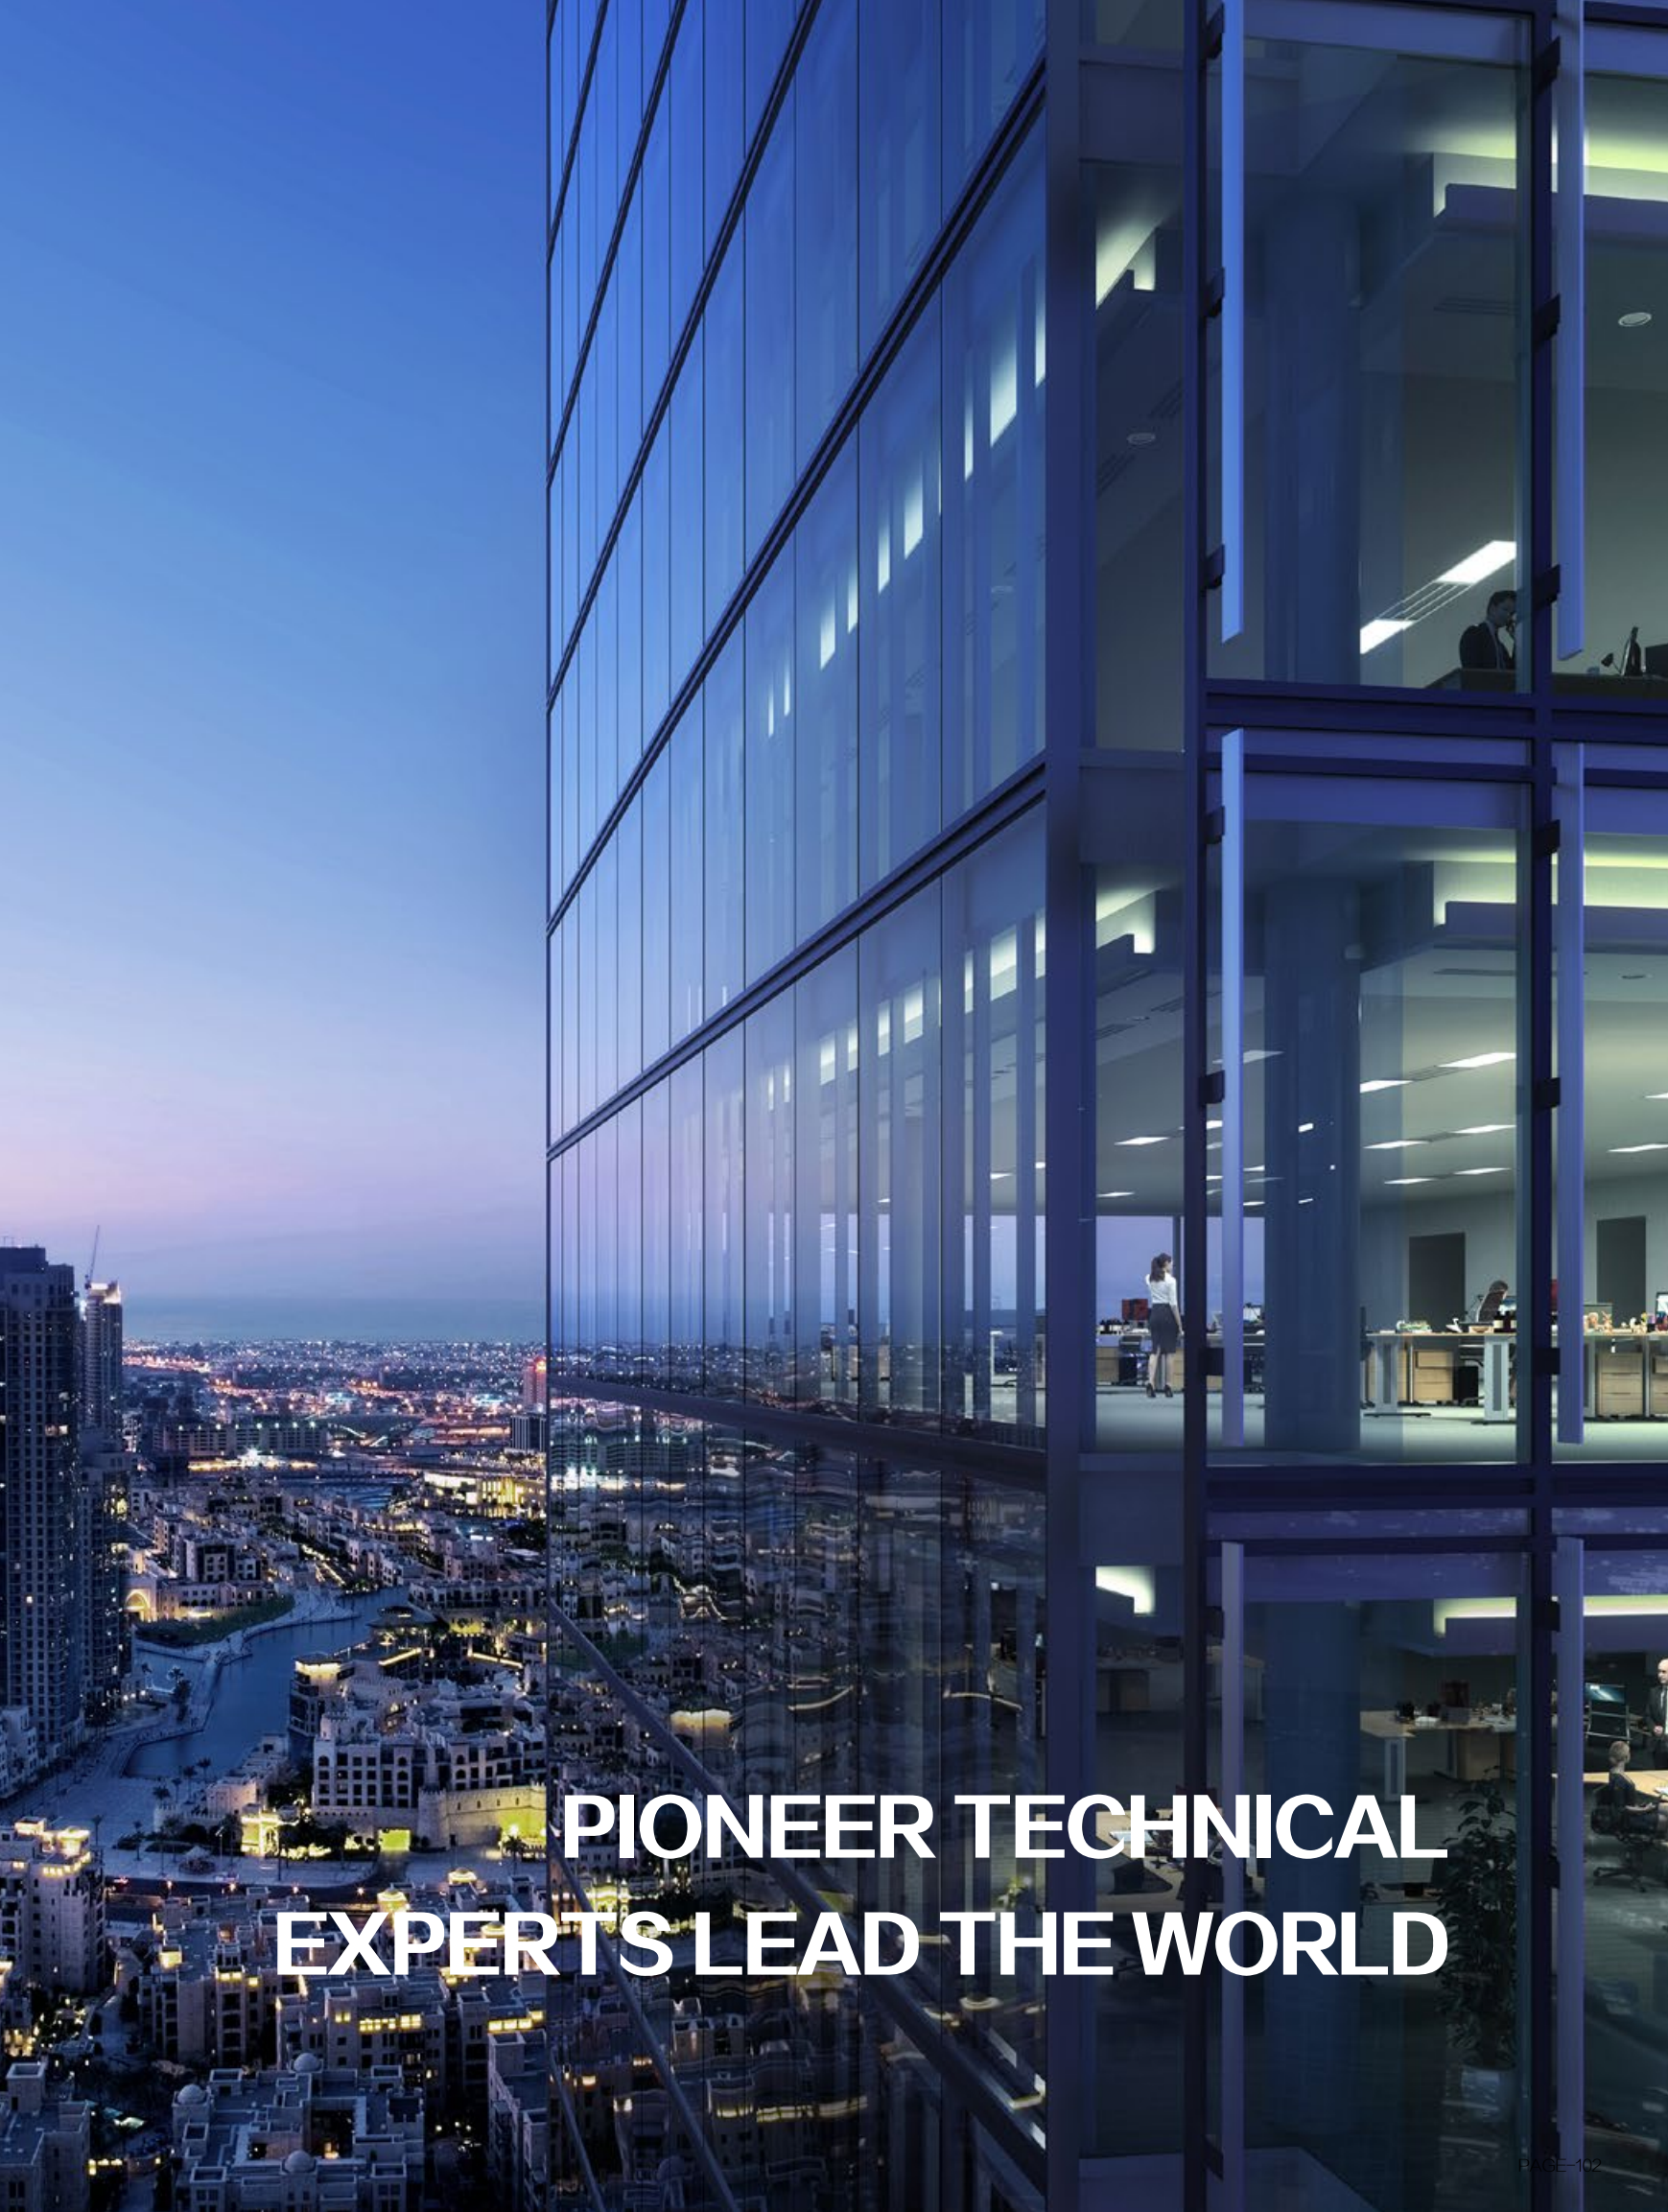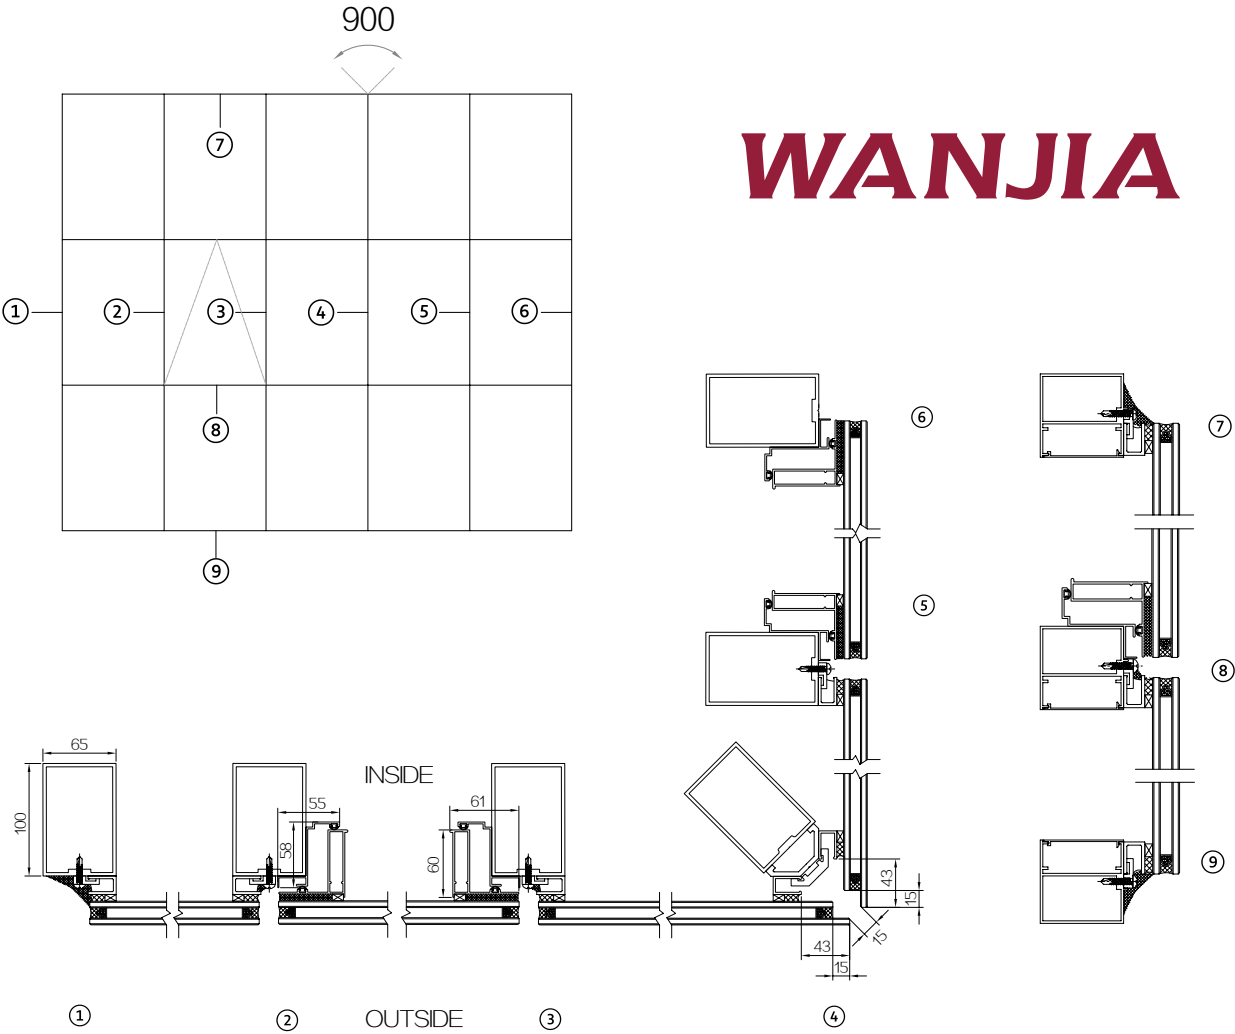

**PIONEER TECHNICAL
EXPERTS LEAD THE WORLD**

147*65 THERMAL BREAK ALUMINUM
VISIBLE CURTAIN WALL

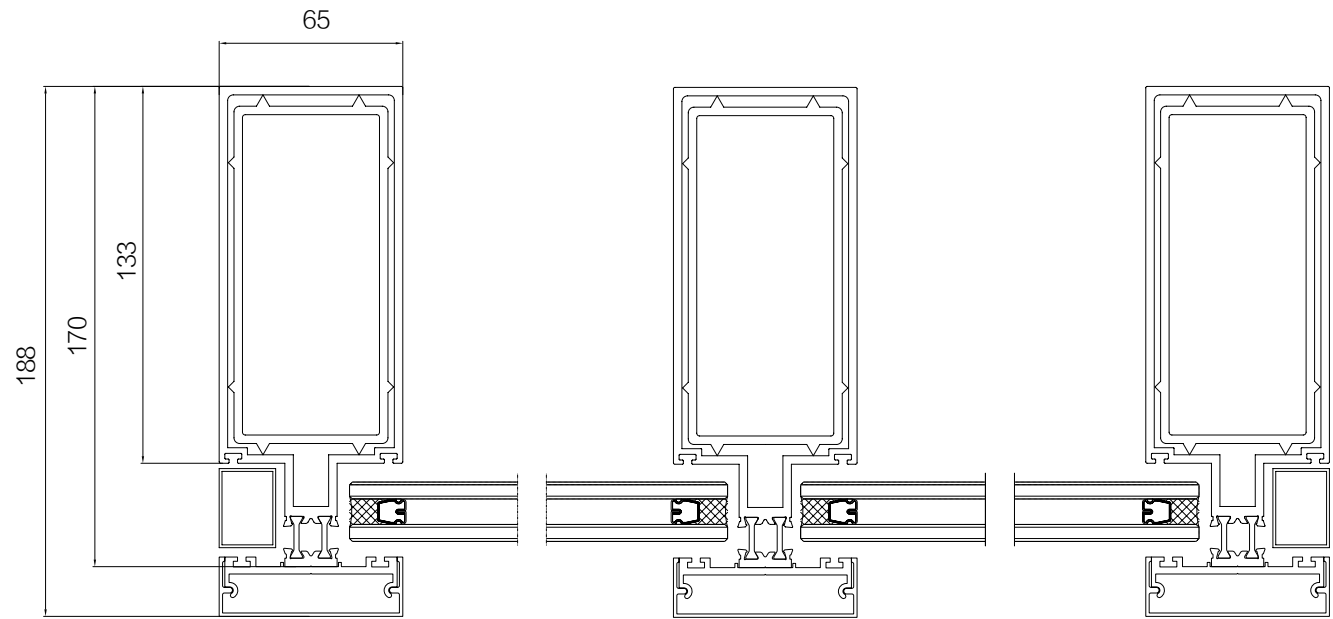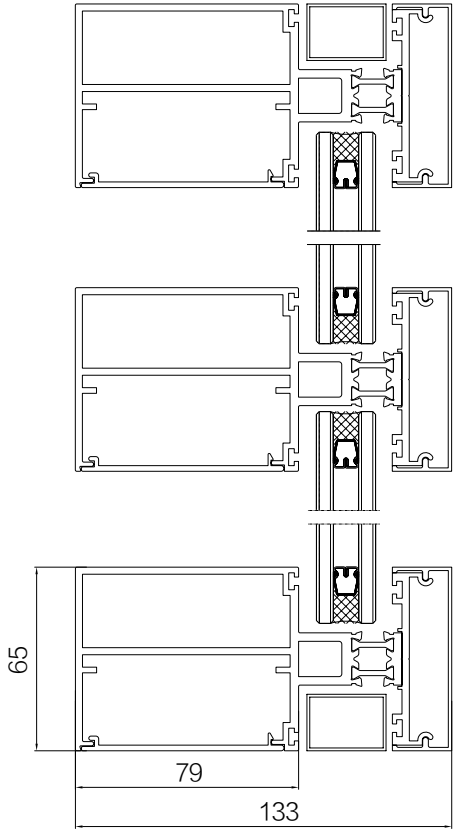

ART
Of Architecture


In addition to transparent, livable and beautiful functions, it also has more functions,

It is important to have energy-saving and safety features. Building curtain wall,

The wall usually bears more than 65% of the energy-saving effect of the building,

The building has a strong displacement and deformation ability because of the building curtain wall,

Strong resistance to deformation and earthquake resistance.

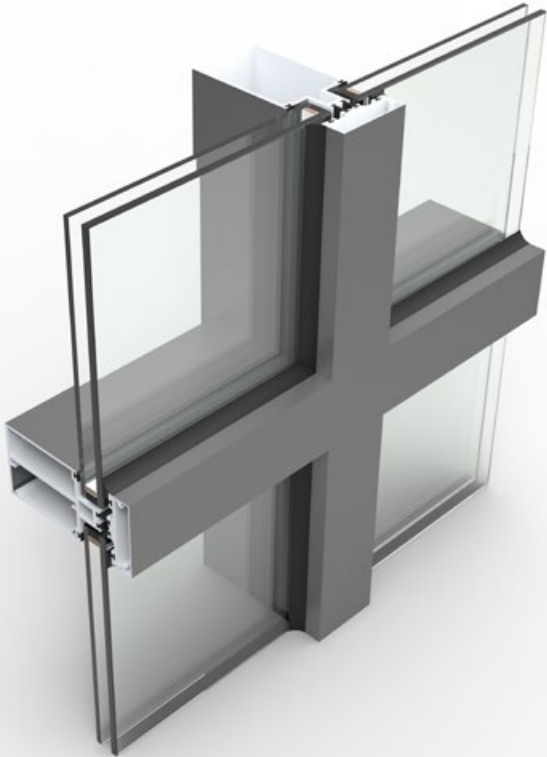

Whether in the garden or on the terrace,
Wanjia doors and windows tailor-made the exclusive sunshine room shape for you.

Customize
Your space



Return to nature and feel life




120



















SERIES ALUMINUM
SUNROOM WITH LIGHT

Product characteristics of sunshine house













The New Chinese Classical style is based on the background of Chinese traditional classical culture, creating a Chinese-style living space. Mahogany, blue and white porcelain, purple sand teapots and some mahogany crafts all reflect the strong oriental beauty. The New Chinese style pays great attention to the sense of hierarchy of space. Through this new separation method, using Chinese-style screens or window frames, it shows the hierarchical beauty of Chinese families.

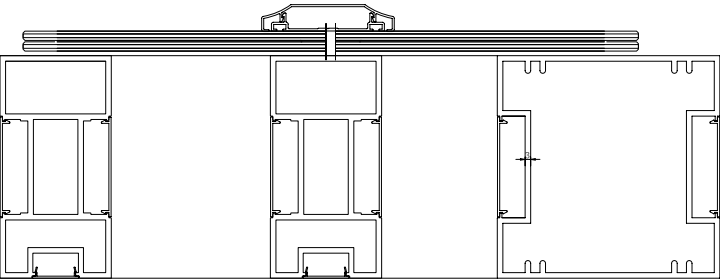










CONTAINING
LAMPS



120 SERIES ALUMINUM
SUNROOM WITH LIGHT



120 SERIES ALUMINUM SUNROOM
EUROPEAN-STYLE

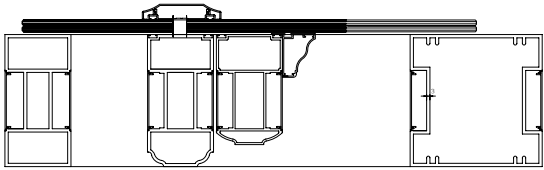

ENGINEERING CASE



Canada



Canada – Apartments



Angola – Villa



Philippines – Residential



Montreal, Canada – Villas



Malaysia – Apartments



America – Office Building



Nigeria – Apartments



America – California – Hotels



South Africa – Villas



Turks and Caicos Islands – Villas



England – Apartments



Singapore – Villas



America – Los Angeles – Apartments